RNAV (GPS) RWY 6

PAGELAND (PYG)

WAAS	APP CRS	Rwy Idg	3396
CH 56440	058°	TDZE	574
W06A		Apt Elev	575

T A NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities ¼ SM. Increase all MDA 60 feet.

MISSED APPROACH: Climb to 2400 direct WOVEX and hold.

EQY ASOS	CHARLOTTE APP CON	(CTAF)
135.775	120.05 307.8	122.9

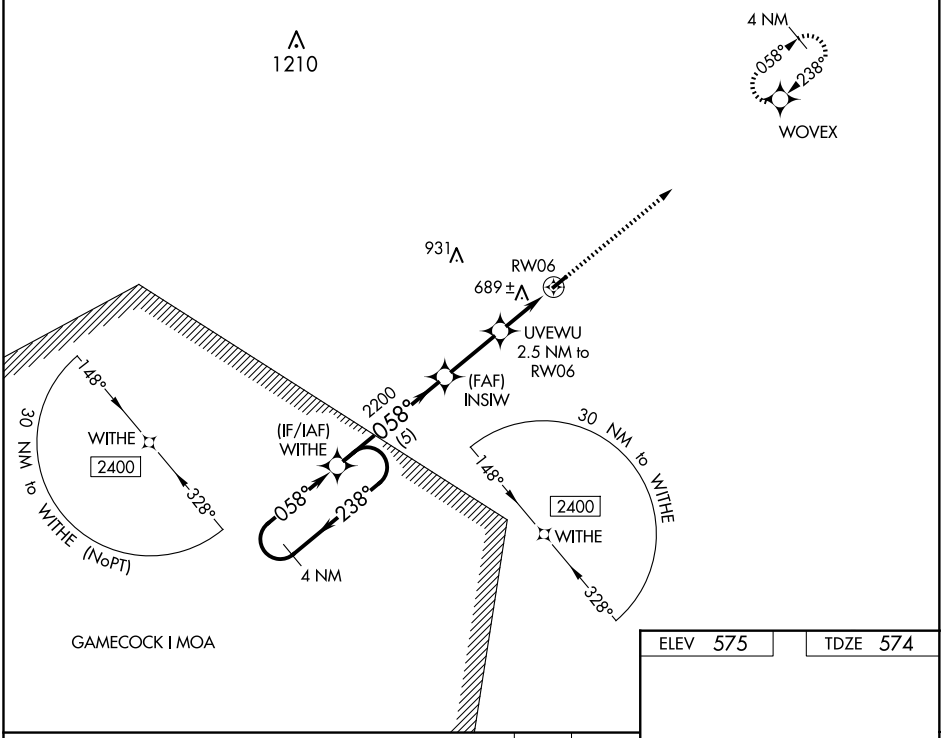

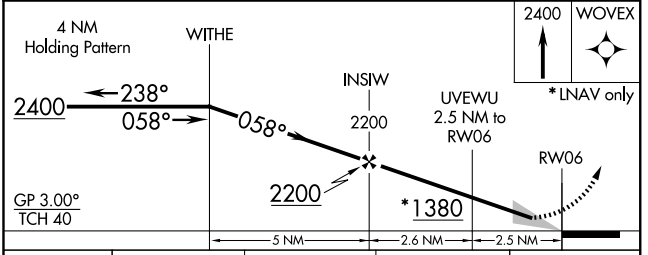

CATEGORY	A	B	C	D
LPV DA	889-1⅛	315 (400-1⅛)	NA	
LNAV/VNAV DA	1085-1⅞	511 (600-1⅞)	NA	
LNAV MDA	1020-1	446 (500-1)	NA	
C CIRCLING	1100-1⅞	525 (600-1⅞)	NA	



SE-2, 10 JUL 2025 to 07 AUG 2025
SE-2, 10 JUL 2025 to 07 AUG 2025