

LOC I-PBV <u>110.1</u>	APP CRS 111°	Rwy Idg 4982 TDZE 128 Apt Elev 128
----------------------------------	------------------------	---


ILS or LOC RWY 11
ST GEORGE (PBV) (PAPB)

T DME from SRI NDB/DME. Simultaneous reception of I-PBV and
A SRI DME required. Circling NA north of Rwy 11-29. ADF and
DME required. Inop table does not apply to S-LOC 11 Cats A
and B and S-ILS 11 all Cats.


MALSF

MISSED APPROACH: Climb to 3200 on SRI
NDB/DME bearing 110° to LJFY/SRI 7.7 DME
and hold, continue climb-in-hold to 3200.


ASOS 135.45	ANCHORAGE CENTER 119.1 339.8	CTAF 122.8 0
----------------	---------------------------------	-----------------

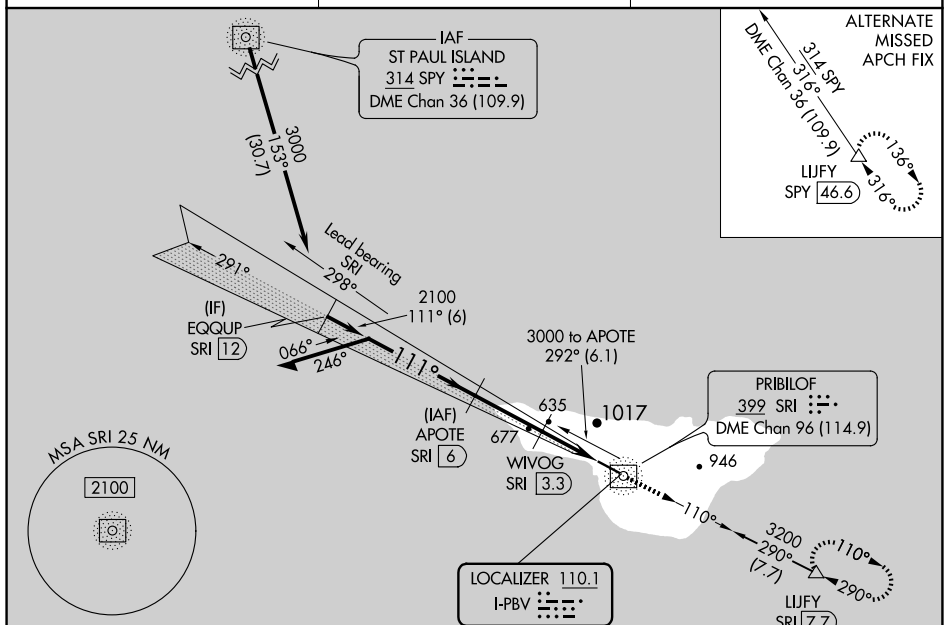

ELEV 128		TDZE 128
----------	--	----------



ADF and DME REQUIRED



CATEGORY	A	B	C	D
S-ILS 11	428-1 300 (300-1)			NA
S-LOC 11	840-1	712 (800-1)	840-1 $\frac{3}{4}$ 712 (800-1 $\frac{3}{4}$)	NA
C CIRCLING	840-1 712 (800-1)	980-1 $\frac{1}{4}$ 852 (900-1 $\frac{1}{4}$)	980-2 $\frac{1}{2}$ 852 (900-2 $\frac{1}{2}$)	NA