RNAV (GPS) RWY 30

WITHAM FLD (SUA)

WAAS	APP CRS	Rwy Ldg	5828
CH 77716	296°	TDZE	16
W30A		Apt Elev	16

Circling to Rwy 07 NA at night. Baro-VNAV NA when using Palm Beach Intl altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Palm Beach Intl altimeter setting: increase LPV DA to 337 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 475 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cats C/D ¼ SM and Circling visibility Cats C/D ½ SM.

MISSED APPROACH: Climb to 2000 direct PETNE and hold.

ATIS	PALM BEACH APP CON	STUART TOWER*	GND CON	CLNC DEL
134.475	132.8	126.6 (CTAF) L	121.7	121.025

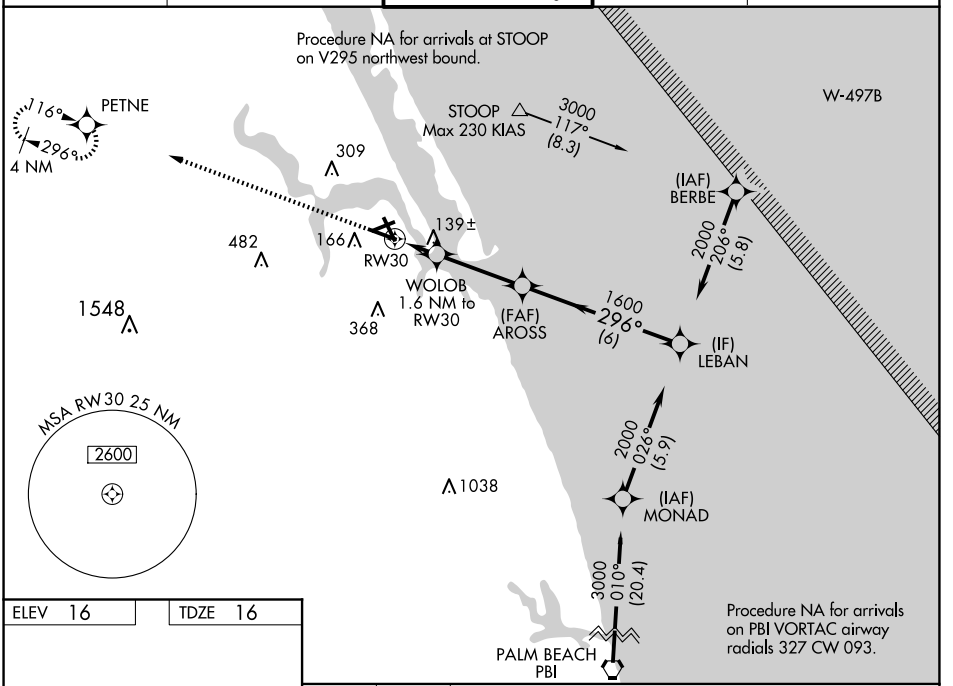



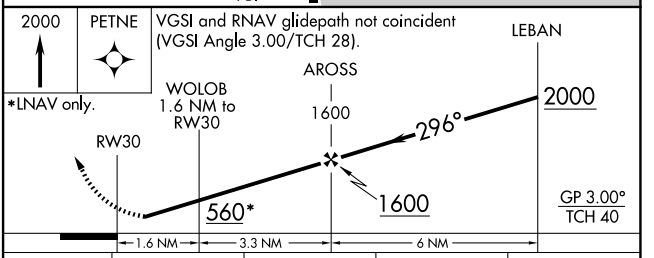

CATEGORY	A	B	C	D
LPV DA	266-7/8 250 (300-7/8)			
LNAV/VNAV DA	404-1 3/8 388 (400-1 3/8)			
LNAV MDA	400-1 384 (400-1)		400-1 1/8 384 (400-1 1/8)	
CIRCLING	480-1 464 (500-1)		680-1 3/4 664 (700-1 3/4)	680-2 664 (700-2)

REIL Rwys 12-30 L
MIRL Rwys 12-30 and 7-25 L

SE-3, 10 JUL 2025 to 07 AUG 2025
SE-3, 10 JUL 2025 to 07 AUG 2025