WAAS	APP CRS	Rwy Ldg	4899
CH 97537	248°	TDZE	661
W25A		Apt Elev	661

RNAV (GPS) RWY 25

PIKE COUNTY (EOP)

RNP APCH - GPS

Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling Rwy 7 NA at night. When local altimeter setting not received, use PMH altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C/D 1⅛ SM, and LP visibility Cat C/D 1⅛ SM, and Circling visibility Cat A/B/C ¼ SM. VDP NA when using PMH altimeter setting.

MISSED APPROACH: Climb to 1120 then climbing left turn to 3000 direct IGMIY and hold.

AWOS-3PT	INDIANAPOLIS CENTER	UNICOM
121.45	135.575 290.5	123.0 (CTAF) L

Procedure NA for arrivals at TARTO on V493 northbound.

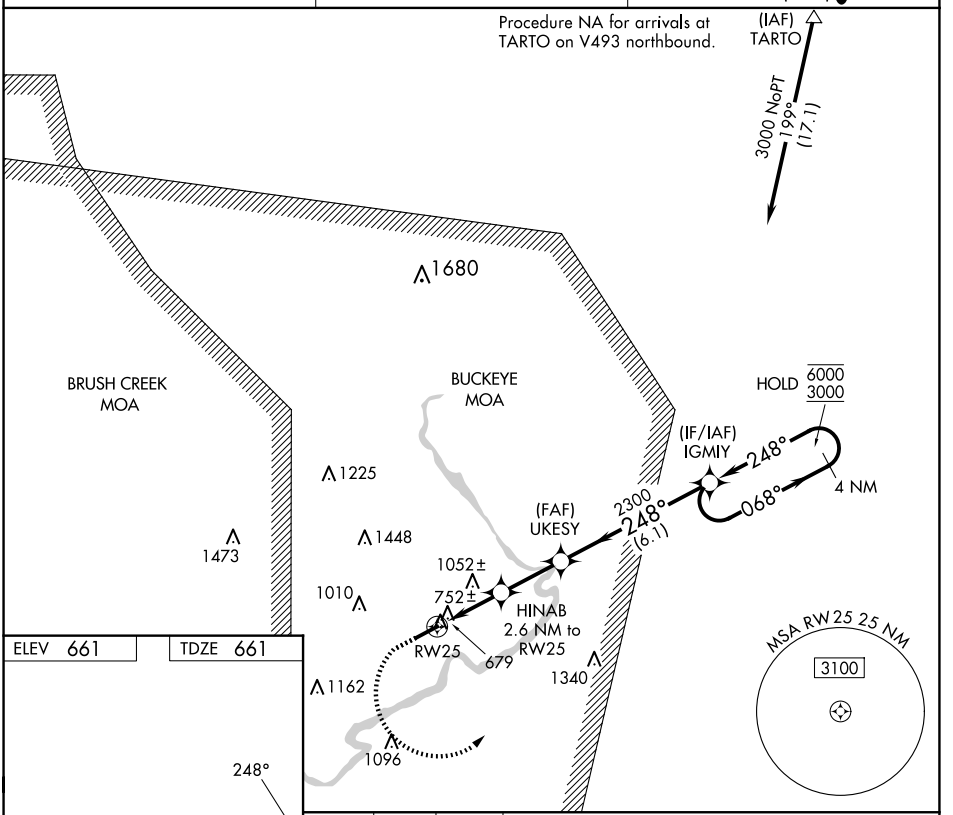

ELEV 661	TDZE 661



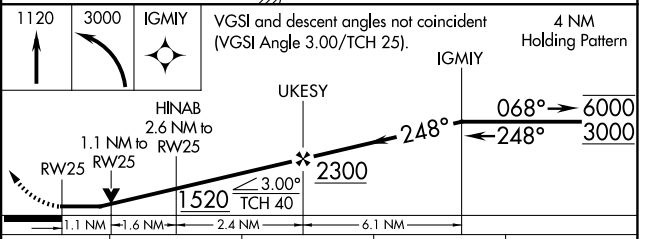

CATEGORY	A	B	C	D
LP MDA	1020-1		359 (400-1)	
LNAV MDA	1280-1	619 (700-1)	1280-1¾	619 (700-1¾)
C CIRCLING	1440-1 779 (800-1)	1460-1 799 (800-1)	1500-2½ 839 (900-2½)	1640-3 979 (1000-3)

REIL Rwys 7 and 25 L
MIRL Rwy 7-25 L

EC-2, 10 JUL 2025 to 07 AUG 2025
EC-2, 10 JUL 2025 to 07 AUG 2025