RNAV (GPS) RWY 27

LINTON MUNI (7L2)

WAAS	APP CRS	Rwy Idg	3700
CH 86630	280°	TDZE	1779
W27A		Apt Elev	1779

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use BIS altimeter setting and increase all DA 107 feet and visibility LPV and LNAV/VNAV all Cats ¼ SM; increase all MDA 120 feet and visibility LNAV Cat C ¼ SM. Baro-VNAV and VDP NA when using BIS altimeter setting.

MISSED APPROACH: Climb to 3600 direct IRSEH and on track 301° to LINTN and hold.

ASOS-3	MINNEAPOLIS CENTER	CTAF
118.175	135.25 256.7	122.9 L

MISSED APCH FIX





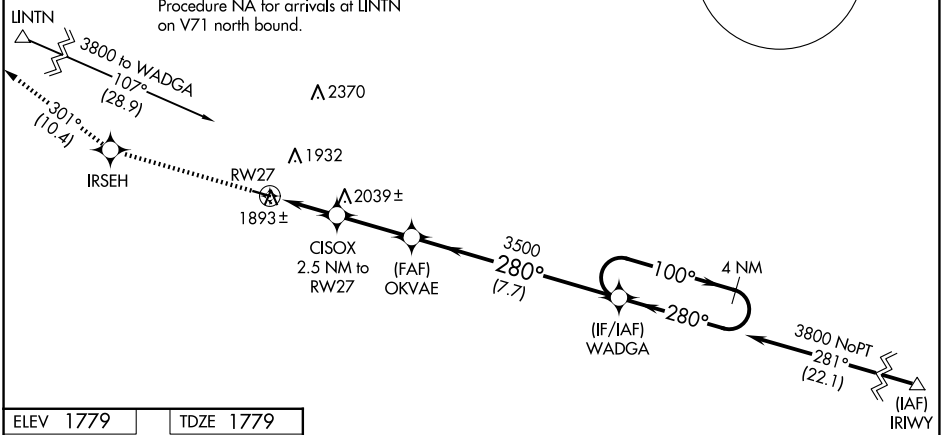

Procedure NA for arrivals at IRIWY on V15 southeast bound.

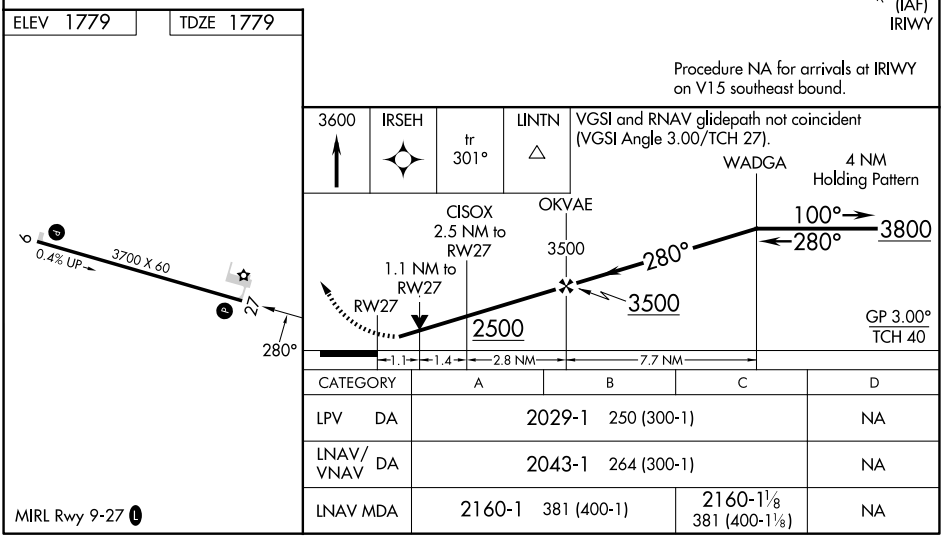

CATEGORY	A	B	C	D
LPV DA	2029-1 250 (300-1)			NA
LNAV/VNAV DA	2043-1 264 (300-1)			NA
LNAV MDA	2160-1 381 (400-1)		2160-1⅛ 381 (400-1⅛)	NA

MIRL Rwy 9-27 L

NC-1, 10 JUL 2025 to 07 AUG 2025
NC-1, 10 JUL 2025 to 07 AUG 2025