| WAAS CH 42825 W10A | APP CRS 096° | Rwy Idg 3000 / TDZE 7 / Apt Elev 7 |
|---|---|---|

# RNAV (GPS) RWY 10

## MIAMI HOMESTEAD GENERAL AVIATION (X51)

Baro-VNAV NA when using Miami Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Exec altimeter setting: increase LPV DA to 284; increase LNAV/VNAV DA to 284; increase all MDA 40 feet.

NA

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct HOLMU and hold.

| AWOS-3 | MIAMI APP CON | UNICOM |
|---|---|---|
| 118.375 | 125.5 354.1 | 122.8 (CTAF) |

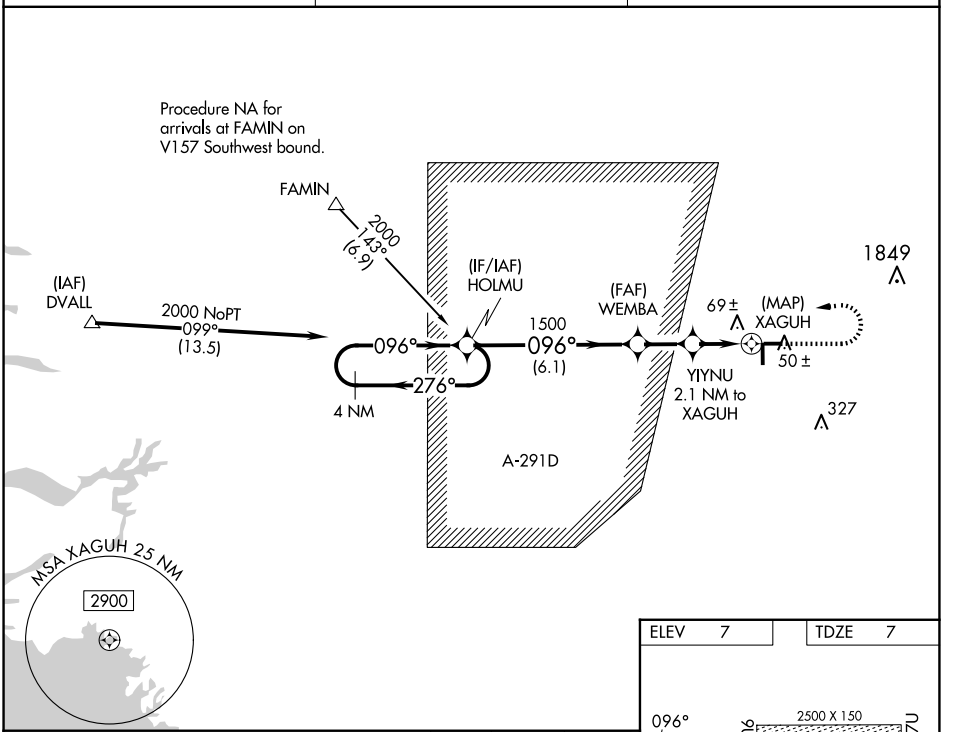


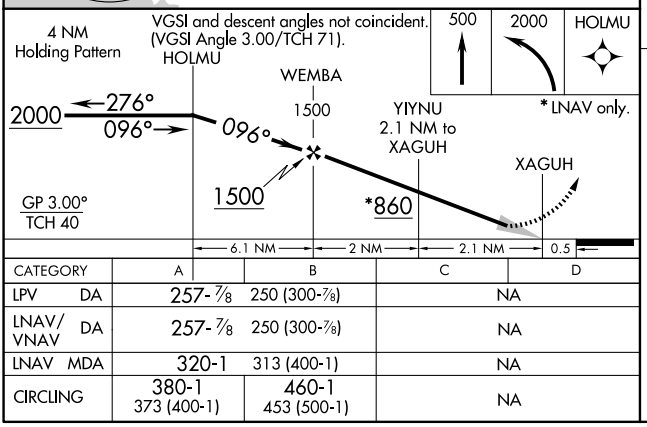


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 257-⅞ | 250 (300-⅞) | NA | |
| LNAV/VNAV DA | 257-⅞ | 250 (300-⅞) | NA | |
| LNAV MDA | 320-1 | 313 (400-1) | NA | |
| CIRCLING | 380-1<br>373 (400-1) | 460-1<br>453 (500-1) | NA | |

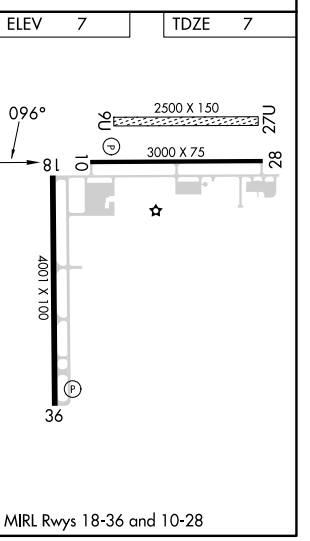


MIRL Rwys 18-36 and 10-28



SE-3, 10 JUL 2025 to 07 AUG 2025
SE-3, 10 JUL 2025 to 07 AUG 2025