


LOC/DME I-ALB	APP CRS	Rwy Ldg	8500
109.5	191°	TDZE	280
Chan 32		Apt Elev	285

ILS or LOC RWY 19

ALBANY INTL (ALB)

<div><div><div></div><div></div></div><div>Circling NA west of Rwy 1-19. Circling Rwy 10 NA at night. DME or RADAR required.</div></div>	<div><div><div></div><div></div></div><div>MALSR</div></div>	<div><div><div></div><div></div></div><div>MISSED APPROACH: Climb to 2000 then climbing left turn to 5000 direct CAM VOR/DME and hold.</div></div>		
D-ATIS 120.45	ALBANY APP CON 132.825 307.2	ALBANY TOWER 119.5 257.8	GND CON 121.7 348.6	CLNC DEL 127.50

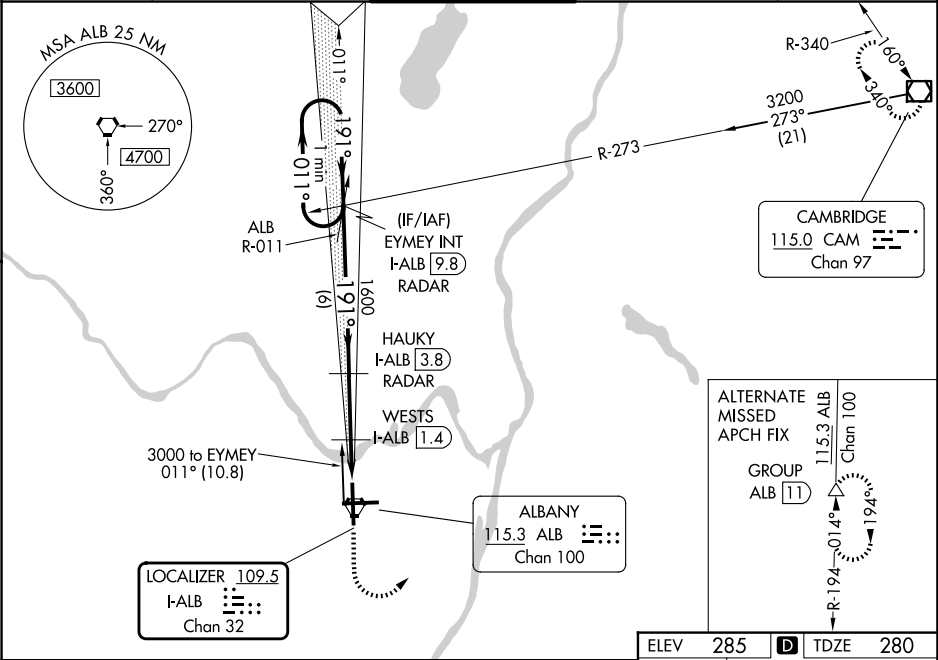

One Minute Holding Pattern		EYMEY INT I-ALB <u>9.8</u> RADAR		HAUKY I-ALB <u>3.8</u> RADAR		WESTS I-ALB <u>1.4</u>		2000 ↑	5000 ↷	CAM ☐
2000 ← 011° 191° →		1600		1600		*820		*LOC only.		
GS 3.00° TCH 54		Use I-ALB DME when on the localizer course.						↘		
		6 NM		2.4 NM		0.7 NM		0.9		
CATEGORY	A		B		C		D			
S-ILS 19	480/18 200 (200-½)									
S-LOC 19	820/24	540 (600-½)				820/55	540 (600-1)			
CIRCLING	820-1	535 (600-1)				860-1½ 575 (600-1½)	960-2¼ 675 (700-2¼)			
WESTS FIX MINIMUMS										
S-LOC 19	620/24	340 (400-½)				620/26	340 (400-½)			
CIRCLING	820-1	535 (600-1)				820-1½ 535 (600-1½)	960-2¼ 675 (700-2¼)			

