

WAAS CH 82718 W04A	APP CRS 038°	Rwy Ldg 13502 TDZE 3607 Apt Elev 3607
--	------------------------	--

RNAV (GPS) Y RWY 4

RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV and LNAV Cat E to 1½ SM.
 **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 5400
direct CIPL and on track 053° to
ZUKTA and hold.

ATIS	AMARILLO APP CON★	AMARILLO TOWER★	GND CON	CLNC DEL	UNICOM
118.85 350.3	119.5 307.0	118.3(CTAF) 0 257.9	121.9 348.6	121.65 239.275	122.95

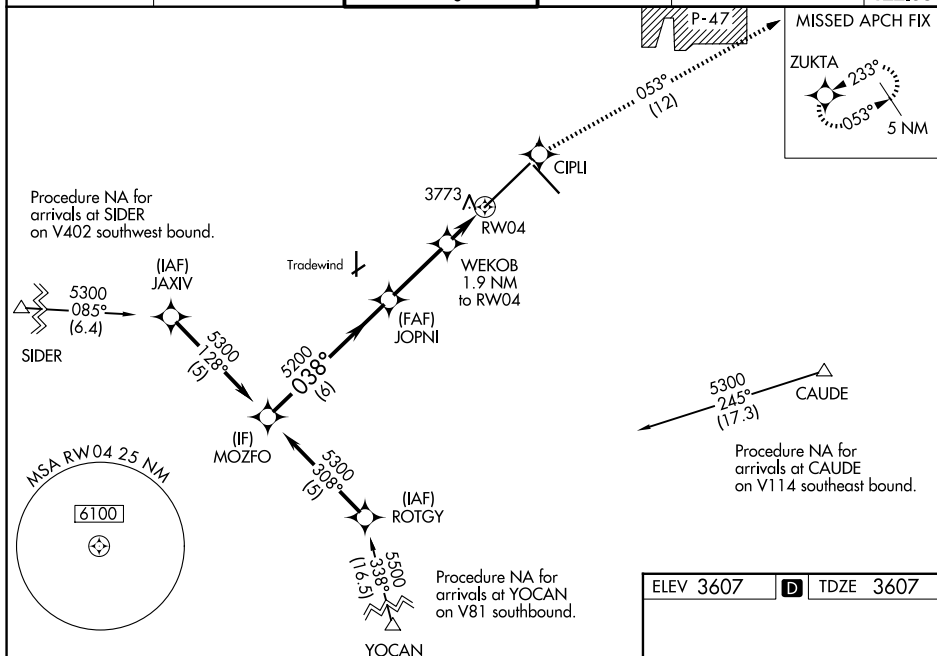

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).

MOZFO

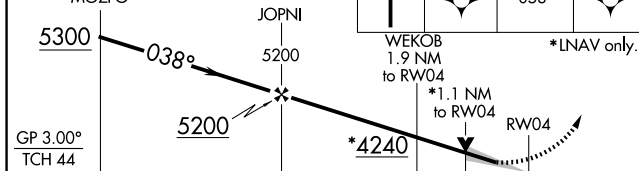

CATEGORY	A		B		C		D		E	
LPV DA **			3807/24		200 (200-½)					
RNAV/ VNAV DA			4028/50		421 (500-1)					
RNAV MDA	4040/24 433 (500-½)		4040/40 433 (500-¾)		4040/50		433 (500-1)			
CIRCLING	4080-1 473 (500-1)		4240-1¾ 633 (700-1¼)		4280-2¼ 673 (700-2¼)		4460-3 853 (900-3)			

