


LOC/DME I-FSQ 108.5 Chan 22	APP CRS 275°	Rwy Ldg 27L 8865 27R 11890 TDZE 999 985 Apt Elev 1026 1026
---	------------------------	--



ILS or LOC RWY 27L
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

DME or RADAR required. RADAR required for procedure entry.	Rwy 27L ALSIF-2	Rwy 27R MALS	MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.
Simultaneous approach authorized.			
Inop table does not apply to Sidestep Rwy 27R.			

D-ATIS ARR 119.65	ATLANTA APP CON	ATLANTA TOWER	ALL RWYS	GND CON	ALL RWYS
DEP 125.55	127.9 379.9	8L-26R 119.1 8R-26L 125.325 9L-27R 123.85 9R-27L 119.3 10-28 119.5 254.4	121.9	121.75	121.65 254.4

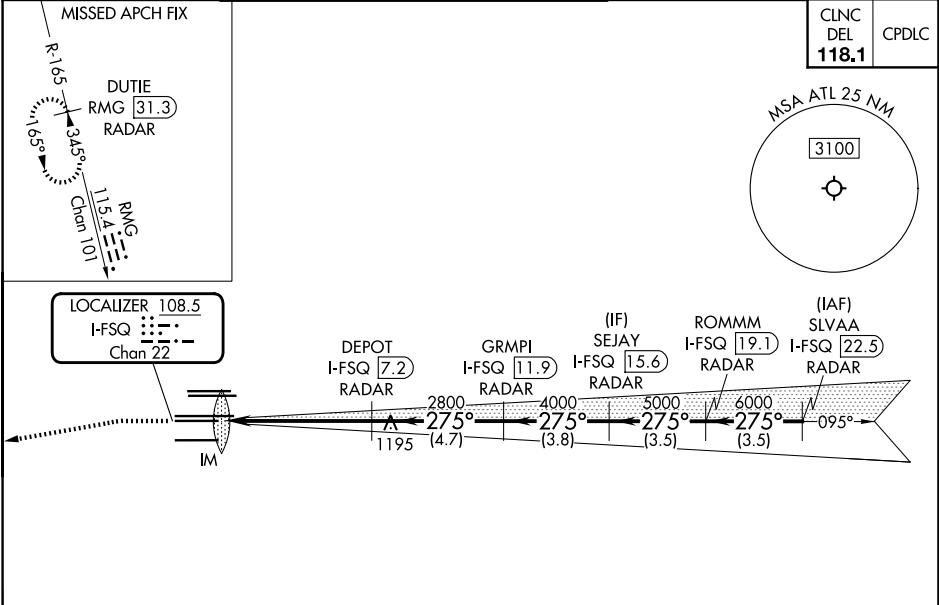

ELEV 1026	TDZE 27L 999	TDZE 27R 985
-----------	--------------	--------------

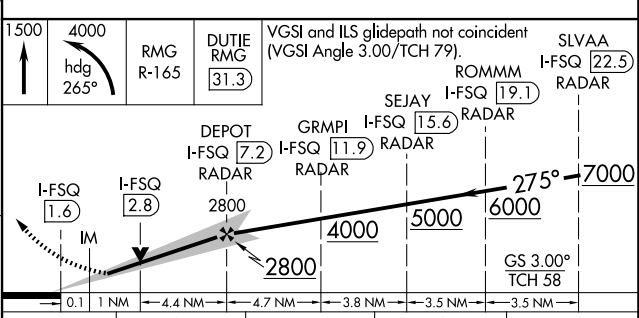

CATEGORY	A	B	C	D
S-ILS 27L	1199/18 200 (200-½)			
S-LOC 27L	1420/24	421 (400-½)	1420/40	421 (400-¾)
SIDESTEP 27R	1420-1½	435 (400-1½)	1420-2¼ 435 (400-2¼)	1420-2¾ 435 (400-2¾)