

WAAS CH <b>72927</b> <b>W36A</b>	APP CRS <b>359°</b>	Rwy Idg TDZE <b>59</b> Apt Elev <b>61</b>
--	------------------------	---

RNAV (GPS) RWY 36



JACK MC NAMARA FLD (CEC)

RNP APCH.

Baro-VNAV NA when using Brookings altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Brookings altimeter setting and increase LPV DA to 406 and LNAV/VNAV DA to 505 and all MDA 100 feet; increase LPV all Cats and LNAV Cat C/D and Circling Cat D visibilities ¼ SM, increase LNAV/VNAV all Cats visibility ⅜ SM, and Circling Cat C visibility ½ SM. Rwy 36 helicopter visibility reduction below 1 SM NA. Straight-In Rwy 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Circling Rwy 18, 30 NA at night.

MISSED APPROACH: Climb to 1300 then climbing left turn to 2400 direct CIGCA and hold.

ASOS <b>119.925</b>	SEATTLE CENTER <b>124.85 306.3</b>	UNICOM <b>122.8</b> (CTAF) <b>1</b>
------------------------	---------------------------------------	--

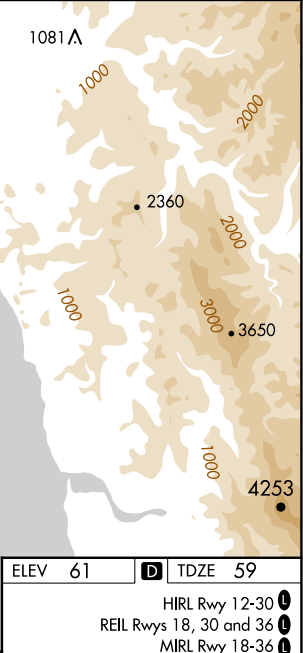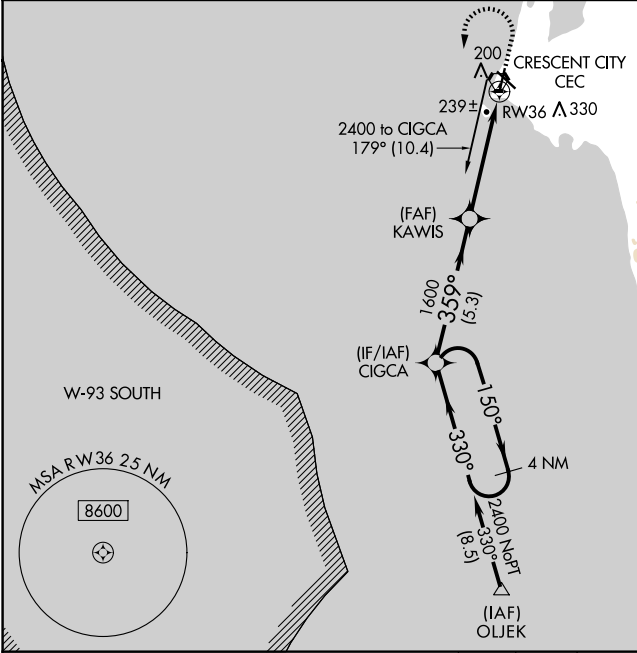

4 NM Holding Pattern		CIGCA		1300	2400	CIGCA
2400		150°	330°	359°	1600	RW36
GP 3.00° TCH 58		KAWIS		1600		
		5.3 NM		4.7 NM		
CATEGORY	A	B	C	D		
LPV DA	309-1		250 (300-1)			
LNAV/VNAV DA	408-1½		349 (400-1½)			
LNAV MDA	500-1	441 (500-1)	500-1¾	441 (500-1¾)		
CIRCLING	540-1	479 (500-1)	640-1½ 579 (600-1½)	640-2 579 (600-2)		

