

WAAS CH <b>70307</b> <b>W27A</b>	APP CRS <b>265°</b>	Rwy Idg TDZE Apt Elev	<b>7985</b> <b>6121</b> <b>6160</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

CHEYENNE RGNL/JERRY OLSON FLD (CYS)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C. For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4000.  
# RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 6600, then climbing right turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.

ATIS <b>134.425 278.3</b>	CHEYENNE APP CON★ <b>124.55 263.075</b>	CHEYENNE TOWER★ <b>118.7(CTAF) 257.8</b>	GND CON <b>121.9 254.275</b>	UNICOM <b>122.95</b>
------------------------------	--	---	---------------------------------	-------------------------

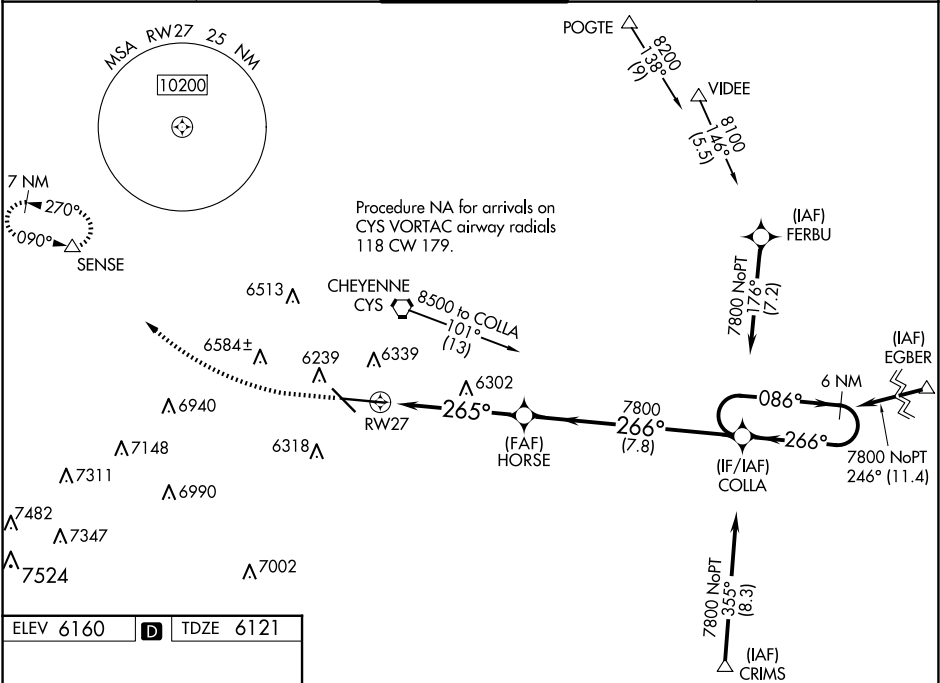

ELEV 6160	D	TDZE 6121
-----------	---	-----------

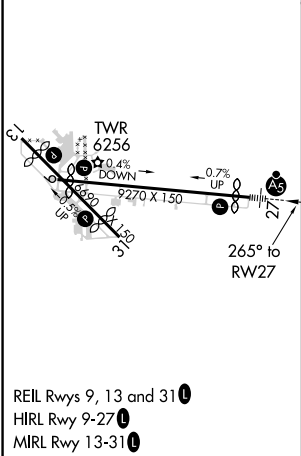

CATEGORY	A	B	C	D
LPV DA#	6321/24	200 (200-½)		
LNAV/VNAV DA	6376/24	255 (300-½)		
LNAV MDA	6560/24	439 (400-½)	6560/40	439 (400-¾)
CIRCLING	6640-1	480 (500-1)	6900-2 740 (800-2)	6920-2½ 760 (800-2½)

NW-1, 07 AUG 2025 to 04 SEP 2025

NW-1, 07 AUG 2025 to 04 SEP 2025