

WAAS
CH **97741**
W04B


APP CRS
047°

Rwy Ldg
TDZE **617**
Apt Elev **620**

RNAV (GPS) RWY 4L

CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS.				MISSED APPROACH: Climb to 1100 then climbing right turn to 2400 direct YIGUT and hold.	
Rwy 4L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.					
D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075	CLNC DEL 124.625	CPDLC

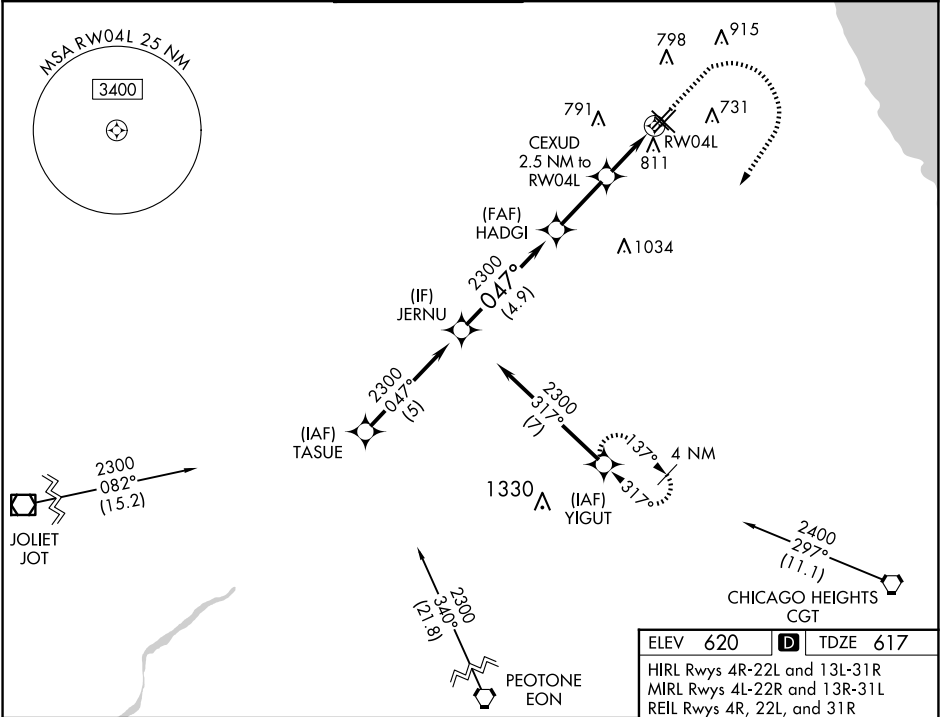

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 39).		1100	2400	YIGUT
JERNU		HADGI	CEXUD	RW04L
2300		2300	2300	1460
GP 3.00° TCH 55		4.9 NM	2.6 NM	1.2 NM
CATEGORY	A	B	C	D
LPV DA	867-¾		250 (300-¾)	
LNAV/VNAV DA	1021-1½		404 (500-1½)	
LNAV MDA	1080-1 463 (500-1)		1080-1¾ 463 (500-1¾)	
CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)