




WAAS CH <b>69618</b> <b>W17A</b>	APP CRS <b>172°</b>	Rwy Ldg TDZE <b>6187</b> Apt Elev <b>6187</b>
----------------------------------------	------------------------	-----------------------------------------------------

RNAV (GPS) Y RWY 17L

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.	
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.					
ATIS <b>125.0 254.3</b>	SPRINGS APP CON <b>124.0 257.875</b>	SPRINGS TOWER <b>119.9 360.6</b>	GND CON <b>121.7 348.6</b>	CLNC DEL <b>134.45 363.125</b>	

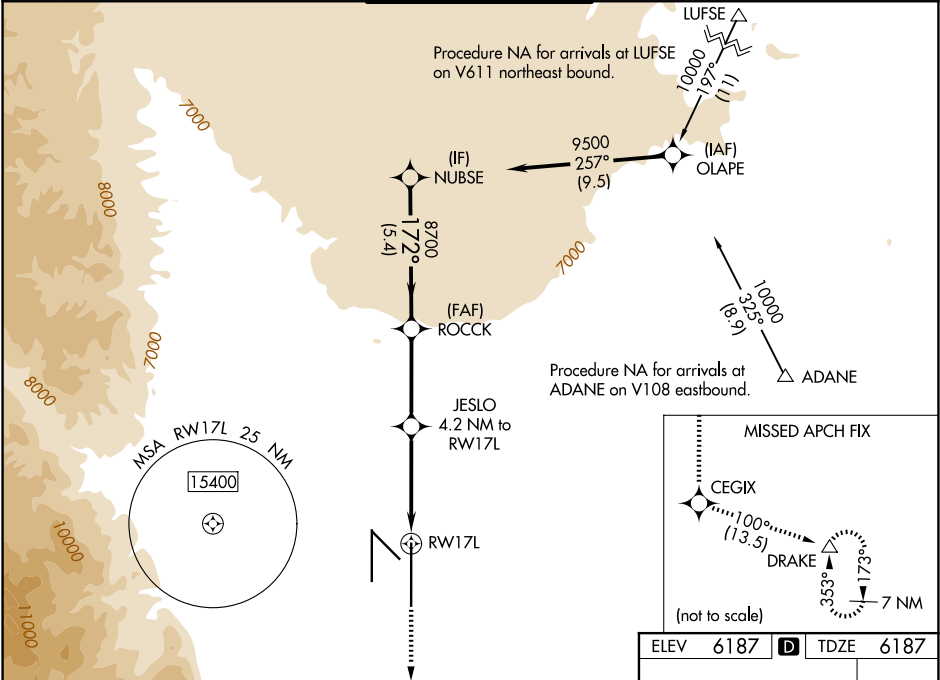

9000

↑

CEGIX

✱

tr 100°

DRAKE

△

ROCCK

8700

NUBSE

9500

JESLO

4.2 NM to RW17L

2.4 NM to RW17L

7580

172°

8700

GP 3.00°

TCH 57

RW17L

2.4 NM

1.8 NM

3.5 NM

5.4 NM

7580

8700

9500

CATEGORY	A	B	C	D
LPV DA	6387/18		200 (200-½)	
LNAV/VNAV DA	6602/45		415 (500-¾)	
LNAV MDA	7000/24 813 (900-½)	7000/40 813 (900-¾)	7000-1⅞	813 (900-1⅞)
CIRCLING	7000-1¼	813 (900-1¼)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

