RNAV (GPS) Z RWY 13L

DALLAS LOVE FLD (DAL)

WAAS CH 99723 W13B	APP CRS 133°	Rwy ldg 7352 TDZE 485 Apt Elev 487

RNP APCH.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.

MALSR (A5)

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLDO and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON	CLNC DEL	CPDLC
120.15	NORTH 124.3 282.275 SOUTH 125.2 343.65	123.7 239.3	121.75 348.6	127.9	

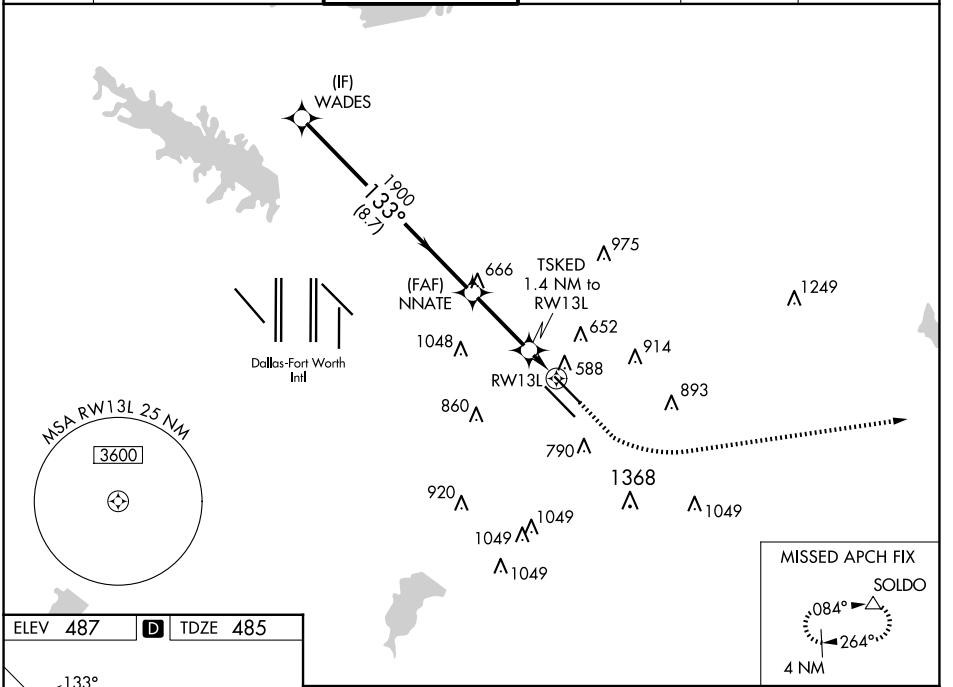

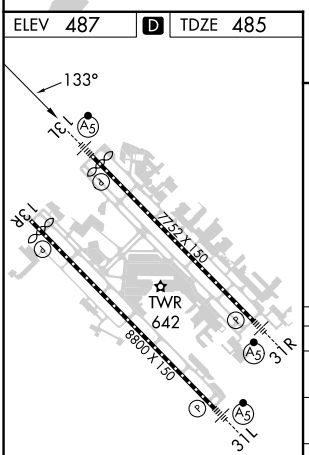

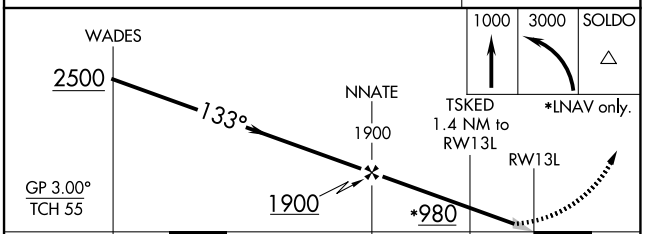

CATEGORY	A	B	C	D
LPV DA	685/18 200 (200-½)			
LNAV/VNAV DA	764/24 279 (300-½)			
LNAV MDA	840/24 355 (400-½)		840/30 355 (400-¾)	
C CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1220-2 733 (800-2)	1520-3 1033 (1100-3)

SC-2, 07 AUG 2025 to 04 SEP 2025
SC-2, 07 AUG 2025 to 04 SEP 2025