LOC RWY 36

BEAUREGARD RGNL (DRI)

LOC I-DRI	APP CRS	Rwy Idg	5494
111.1	355°	TDZE	197
		Apt Elev	202

T A NA — Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat C ⅛ SM and Circling Cats C/D visibility ¼ SM.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT	POLK APP CON	UNICOM
118.225	123.7 261.3	122.8 (CTAF) L

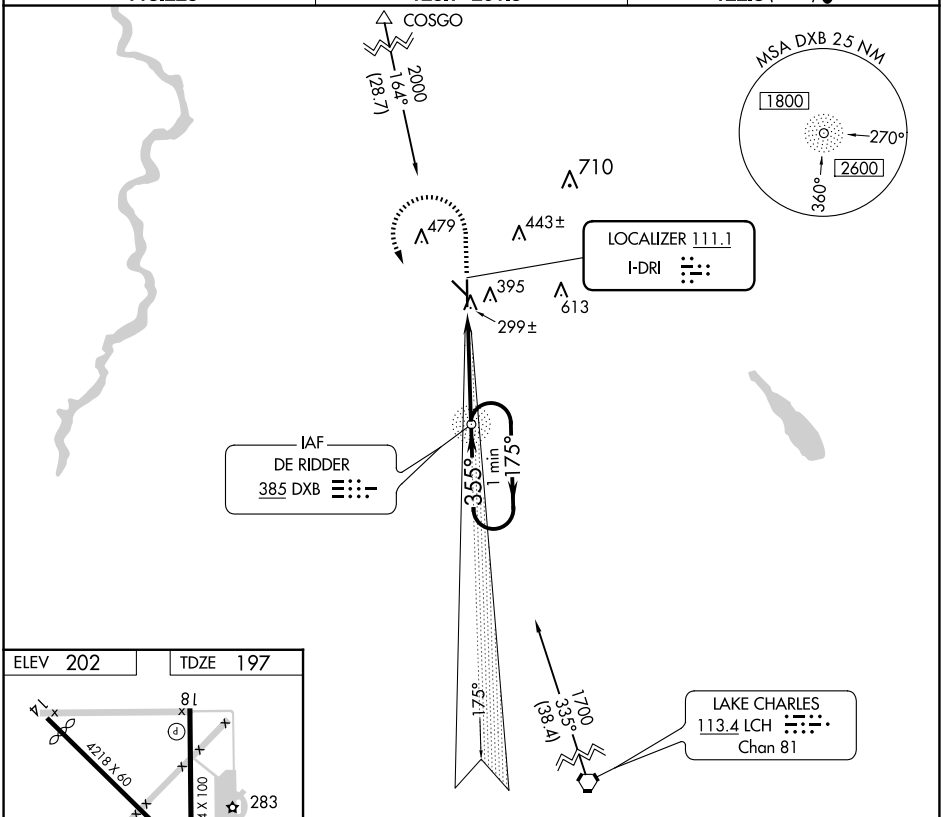

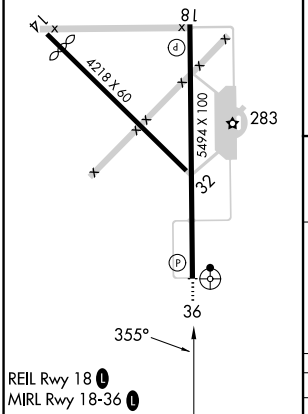

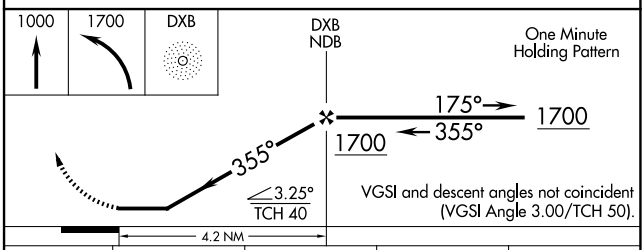

FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

SC-4, 07 AUG 2025 to 04 SEP 2025
SC-4, 07 AUG 2025 to 04 SEP 2025