

|                           |                        |  |
|---------------------------|------------------------|--|
| LOC I-FJU<br><b>110.1</b> | APP CRS<br><b>045°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>8075</b><br><b>661</b><br><b>680</b> |
|---------------------------|------------------------|--|

ILS or LOC RWY 4R


CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 060° and OBK VOR/DME R-134 to LAIRD INT/OBK 21.4 DME and hold.

|  |  |                                     |  |  |                          |       |
|--|--|-------------------------------------|--|--|--------------------------|-------|
| D-ATIS<br><b>135.4</b><br><b>282.225</b> | CHICAGO<br>APP CON<br><b>119.0 292.125</b> | O'HARE TOWER<br><b>120.75 348.0</b> | <b>124.125</b> (TWR NORTH)<br><b>118.05</b> (TWR SOUTH)<br><b>226.675</b> (ALL TWRs) | GND CON<br>(TWR CENTER)<br><b>121.75</b> (OBND)<br><b>121.9</b> (IBND) | CLNC DEL<br><b>121.6</b> | CPDLC |
|--|--|-------------------------------------|--|--|--------------------------|-------|

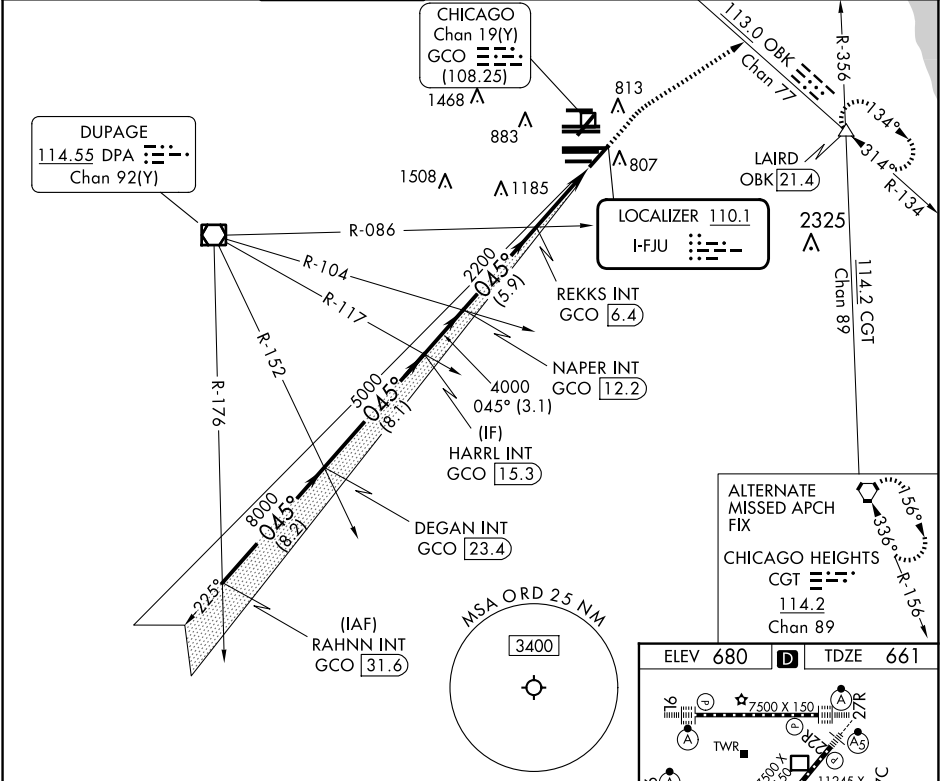

|                    |                    |                    |                    |                   |           |       |
|--------------------|--------------------|--------------------|--------------------|-------------------|-----------|-------|
| RAHNN INT GCO 31.6 | DEGAN INT GCO 23.4 | HARRL INT GCO 15.3 | NAPER INT GCO 12.2 | REKKS INT GCO 6.4 | OBK R-134 | LAIRD |
| 11000              | 8000               | 5000               | 4000               | 2200              | 2128      |       |
| GS 3.00° TCH 52    | 8.2 NM             | 8.1 NM             | 3.1 NM             | 5.9 NM            | 4.4 NM    |       |
| CATEGORY           | A                  | B                  | C                  | D                 |           |       |
| S-ILS 4R           |                    | 861/18             | 200 (200-½)        |                   |           |       |
| S-LOC 4R           | 1160/24            | 499 (500-½)        | 1160/50            | 499 (500-1)       |           |       |
| CIRCLING           | 1220-1             | 540 (600-1)        | 1220-1½            | 1460-2½           |           |       |

