

WAAS CH <b>50228</b> <b>W22B</b>	APP CRS <b>225°</b>	Rwy Ldg TDZE <b>654</b> Apt Elev <b>680</b>
--	------------------------	---

RNAV (GPS) RWY 22L


CHICAGO O'HARE INTL (ORD)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 22R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct CGT VORTAC and hold.

D-ATIS <b>135.4</b> <b>282.225</b>	CHICAGO APP CON <b>119.0 292.125</b>	O'HARE TOWER <b>120.75 348.0</b>	GND CON <b>124.125</b> (TWR NORTH) <b>118.05</b> (TWR SOUTH) <b>226.675</b> (ALL TWRs)	(TWR CENTER) <b>121.75</b> (OBND) <b>121.9</b> (IBND)	CLNC DEL <b>121.6</b>	CPDLC
--	--	-------------------------------------	---	---	--------------------------	-------

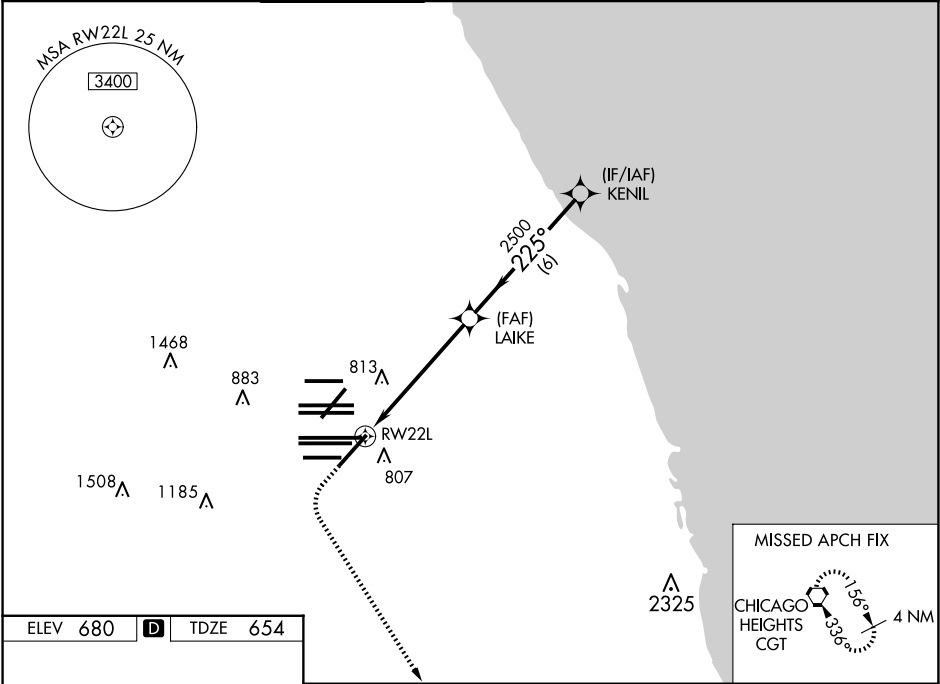

ELEV 680	<b>D</b>	TDZE 654
----------	----------	----------

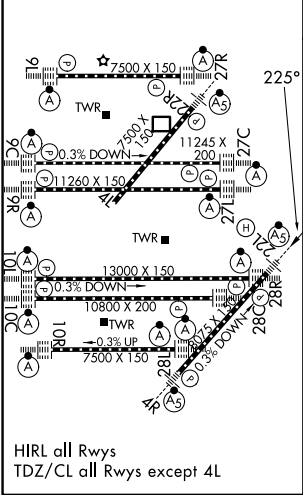

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT

1100

4000

CGT