RNAV (GPS) RWY 28R

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	13000
CH 42804	273°	TDZE	651
W28A		Apt Elev	680

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to 1¼ mile and LNAV Cats C/D visibility to RVR 6000. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	132.7 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	

RADAR REQUIRED

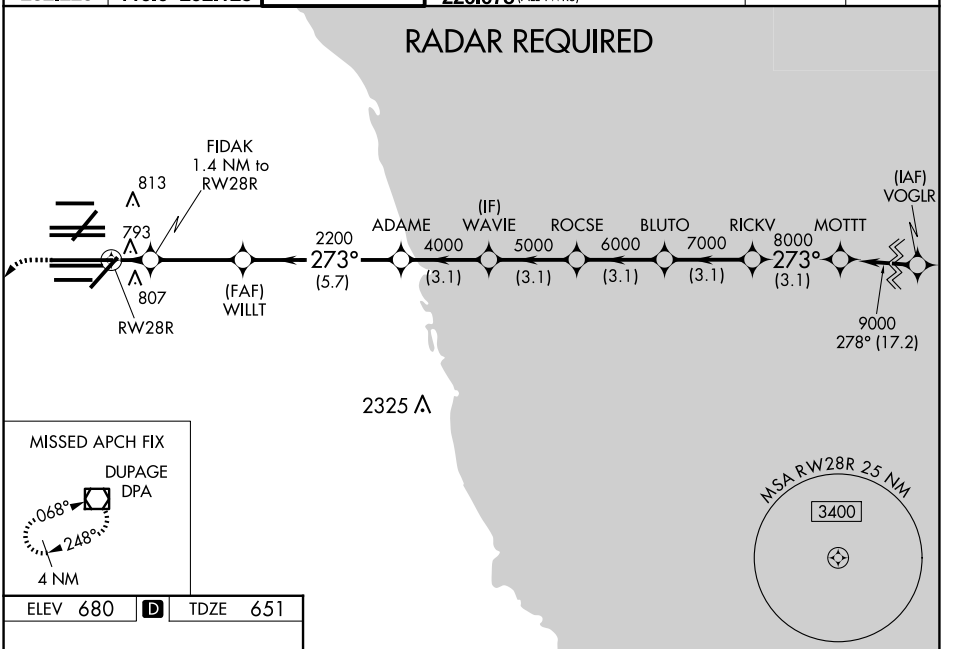

MISSED APCH FIX
DUPAGE DPA
068°
248°
4 NM

MSA RW28R 25 NM
3400

ELEV 680 D TDZE 651

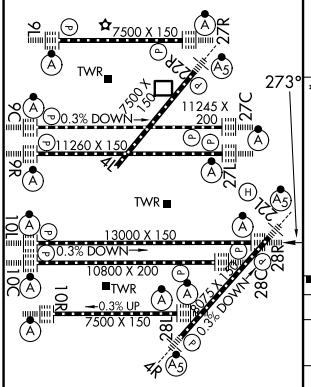

HIRL all Rwys
TDZ/CL all Rwys except 4L

1200 4000 DPA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

*LNAV only.

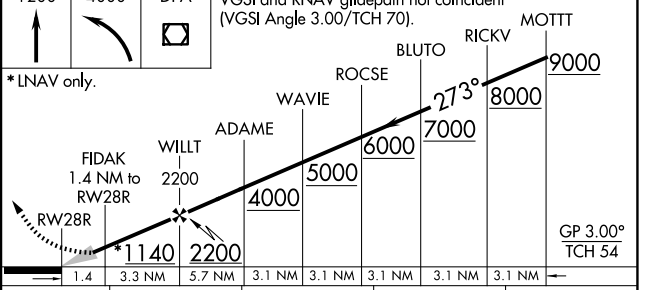

CATEGORY	A	B	C	D
LPV DA	851/18 200 (200-½)			
LNAV/VNAV DA	1041/45 390 (400-⅞)			
LNAV MDA	1060/24 409 (400-½)		1060/40 409 (400-¾)	

EC-3, 07 AUG 2025 to 04 SEP 2025
EC-3, 07 AUG 2025 to 04 SEP 2025