


APP CRS	Rwy Ldg	9000
271°	TDZE	3852
	Apt Elev	3877

RNAV (RNP) Z RWY 27
HELENA RGNL (HLN)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 12000 on the RNAV missed approach route to PIXXI and hold, continue climb-in-hold to 12000. *Missed approach requires minimum climb of 280 feet per NM to 7800. #Missed approach requires minimum climb of 375 feet per NM to 6300.
▼ ▲ ❄ -16°C Inop table does not apply to RNP 0.30 DA. For uncompensated Baro-VNAV systems, procedure NA below -28°C or above 54°C. For inop ALS, increase RNP 0.13 DA* visibility all Cats to ¾ SM, RNP 0.30 DA* visibility all Cats to 1¾ SM.	AS	

ATIS 120.4	HELENA APP CON * 119.5 229.4	HELENA TOWER * 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
---------------	---------------------------------	--	------------------	------------------

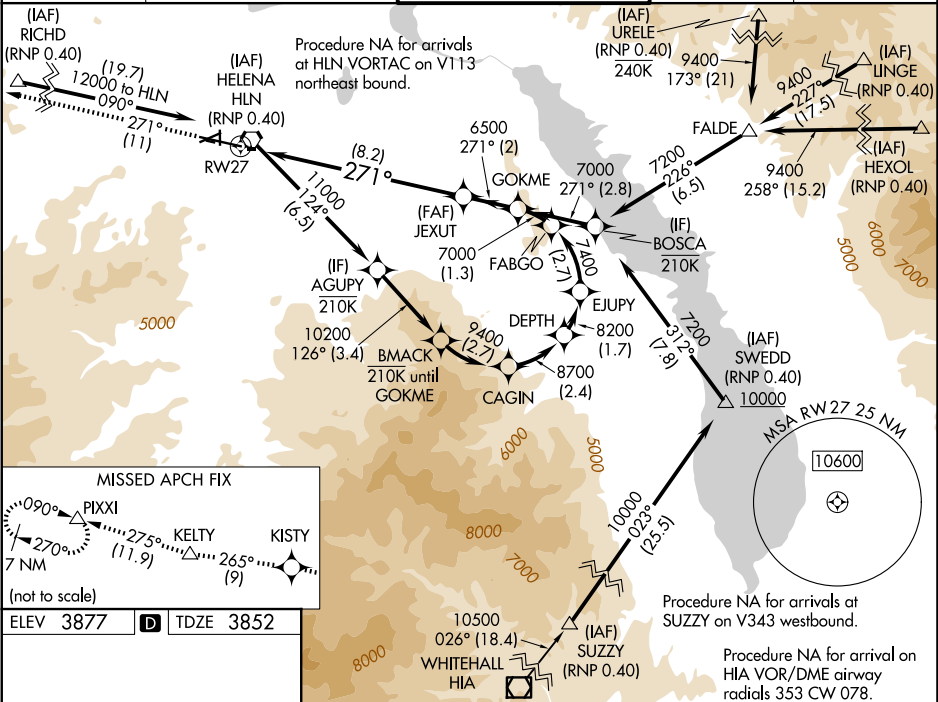

ELEV 3877	D	TDZE 3852
REIL Rws 9, 17, and 35 MIRL Rws 5-23 and 17-35 HIRL Rwy 9-27		
See planview for multiple IF locations.		
CATEGORY		
RNP 0.13 DA*		
RNP 0.20 DA#		
RNP 0.30 DA#		
RNP 0.30 DA		
AUTHORIZATION REQUIRED		