

WAAS CH 62802 W32A	APP CRS 320°	Rwy Ldg 7278 TDZE 793 Apt Elev 796
--	------------------------	---

RNAV (GPS) Y RWY 32
INDIANAPOLIS INTL (IND)



T For uncompensated Baro-VNAV systems, LNAV/VNAV
A NA below -18°C (0°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. **RVR 1800 authorized
with use of FD or AP or HUD to DA.

MALSR





MISSED APPROACH: Climb to 3000 direct KEADY and hold.

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 251.1	GND CON 121.9	CLNC DEL 128.75 251.1	CPDLC
-------------------------	--	----------------------------------	-------------------------	---------------------------------	-------

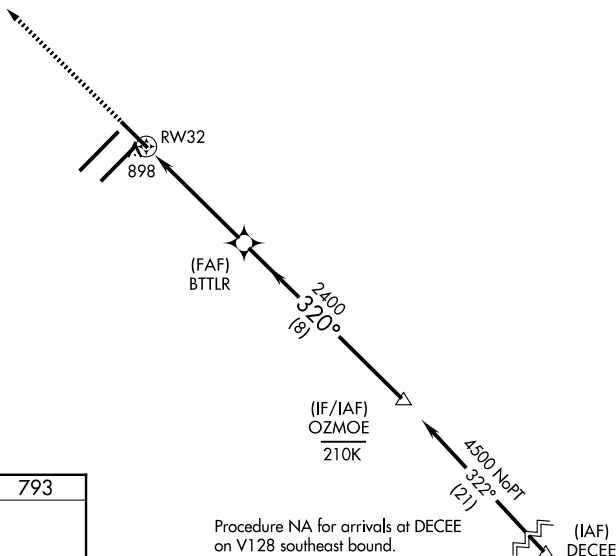

ELEV 796	D	TDZE 793
----------	----------	----------

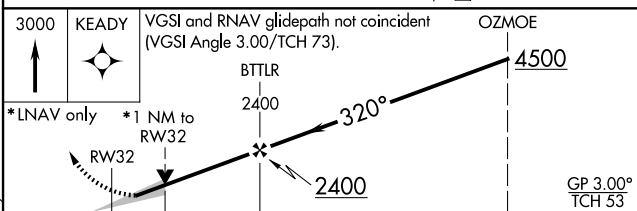

		1 NM		3.9 NM		8 NM			
CATEGORY		A		B		C		D	
LPV	DA			** 993/24		200 (200-½)			
LNAV/ VNAV	DA			1069/24		276 (300-½)			
LNAV	MDA	1160/24		367 (400-½)		1160/35		367 (400-⅝)	
CIRCLING		1420-1		624 (700-1)		1420-1¾ 624 (700-1¾)		1560-2½ 764 (800-2½)	

RNAV (GPS) Y RWY 32