




HI-TACAN Z RWY 28







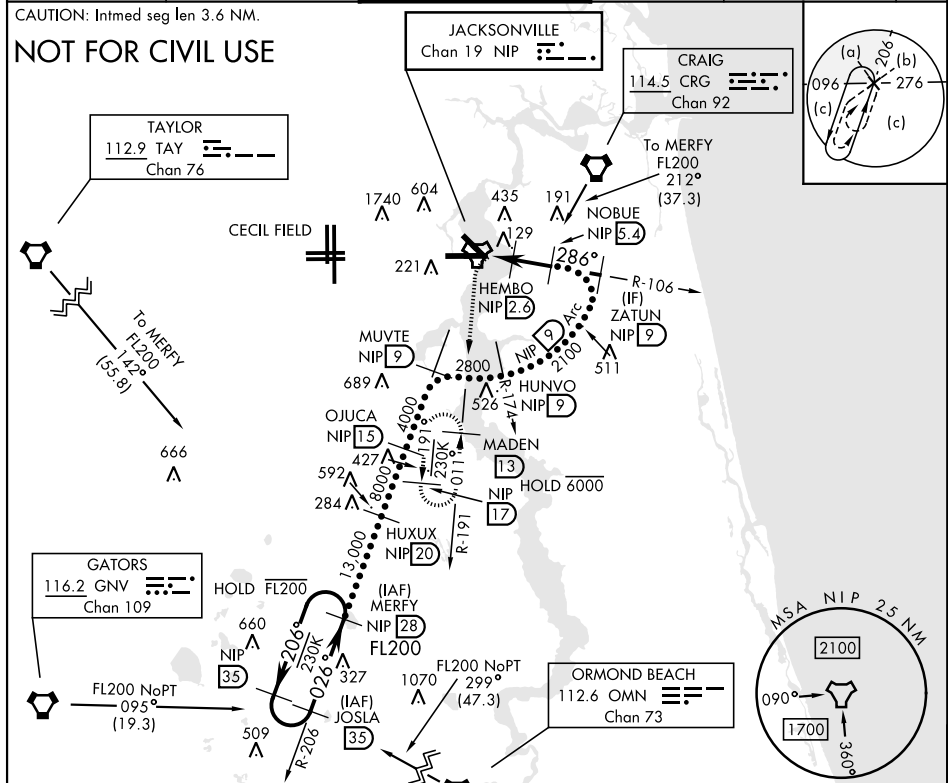


TACAN Chan 19	NIP 286°	APCH CRS 286°	Rwy Idg TDZE Arpt Elev	9003 13 23	[USN]	JACKSONVILLE NAS (TOWERS FLD) (KNIP)
 * When ALS inop, increase CAT CDE vis to 1½ miles.					 SALSF	MISSED APPROACH: Climb to 2000 direct NIP TACAN and turn left outbound R-191 to MADEN and hold.
ATIS 124.35 290.425		APP CON 127.775 377.075		NAVY JACKSONVILLE TOWER 125.15 (CTAF) 340.2		GND CON 128.6 336.4
				CLNC DEL 134.775 0353.675		ASR/ PAR

CAUTION: Intmed seg len 3.6 NM.

NOT FOR CIVIL USE



EMERG SAFE ALT 100 NM 2800

EMERG SAFE ALT 100 NM 2800				ELEV	23	D	TDZE	13
 2000  NIP R-191	MADEN NIP 13	 NIP TACAN  NIP 1.1  NIP 1.6  NIP 2.6  NIP 5.4  NIP 9		ZATUN 2100 286° 1600 700 2.99° TCH 60 0.5 1.5 NM 2.8 NM				
CATEGORY	C		D	E				
S-28 *	400-7/8		387 (400-7/8)					
CIRCLING	560-1 1/2 537 (600-1 1/2)		780-2 1/2 757 (800-2 1/2)	980-3 957 (1000-3)				
				HIRL Rwy 10-28 L				

JACKSONVILLE, FLORIDA

30°14'N-81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

HI-TACAN Z RWY 28