



LOC I-BUI 111.7	APP CRS 231°	Rwy Ldg TDZE Apt Elev 9495 984 986
---------------------------	------------------------	--

ILS or LOC RWY 23R

MC GHEE TYSON (T'YS)

DME or RADAR required.		ALSf-2	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 240° and VXV VORTAC R-231 to GROSS INT/VXV 29.1 DME and hold.
For inop ALS, increase S-ILS 23R Cat E visibility to RVR 4000; increase S-LOC 23R Cat C/D/E visibility to 1½ SM.			

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

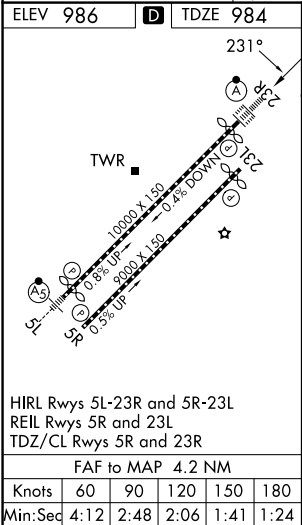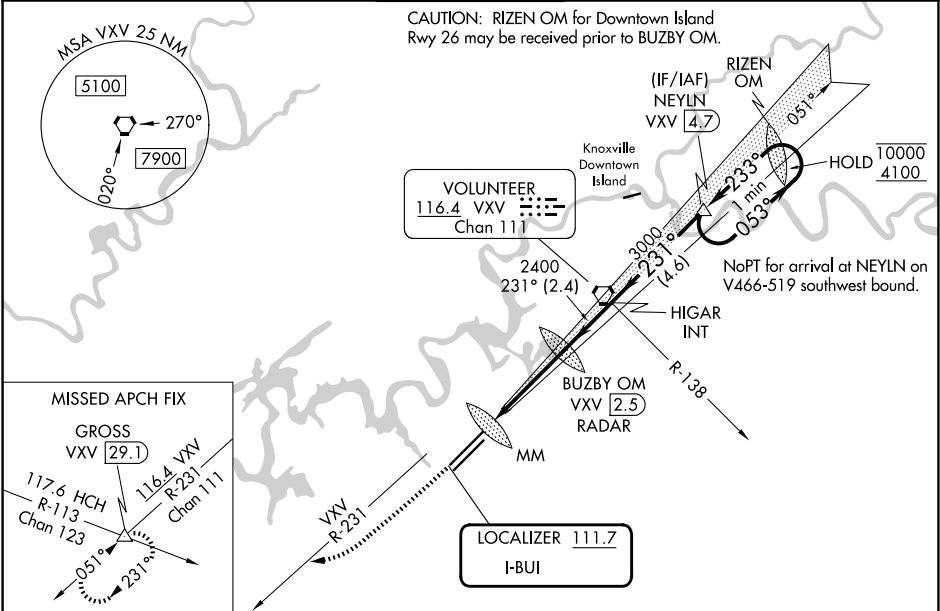

2000 4000		VXV R-231	GROSS	One Minute Holding Pattern		
BUZBY OM VXV 2.5 RADAR		HIGAR INT	NEYLN VXV 4.7			
VXV 6.6		2364	2400			
0.3 1.3 2.5 NM		2.4 NM	4.6 NM			
CATEGORY	A	B	C	D	E	
S-ILS 23R	1184/18 200 (200-½)					
S-LOC 23R	1560/24 576 (600-½)		1560-1¼ 576 (600-1¼)			
CIRCLING	1560-1 574 (600-1)		1660-2 674 (700-2)		1900-3 914 (1000-3)	