

LAS VEGAS, NEVADA

HI-TACAN RWY 3R

TACAN LSV
Chan 12

APCH CRS
029°

Rwy ldg
TDZE
Arpt Elev

10,051
1833
1869

AL-227 (USAF)

NELLIS AFB (KLSV)

RADAR required.
* When ALS inop, increase vis to 1 3/8 miles.
** Circling NA SE of Rwy 3R-21L.

ALSF-1

MISSED APPROACH: Climb to 9000 on LSV TACAN R-031 to VETT and hold.


ATIS
270.1

APP CON
124.95 273.55

TOWER
132.55 327.0

GND CON
121.8 275.8

CLNC DEL
120.9 289.4




† CAUTION: Missed Approach
Minimum Climb Rate to 4500

Knots	60	120	180	240	300	360
V/V(fpm)	283	566	849	1132	1415	1698

Controlling Obstacle 4209'

MISSED APPROACH
requires use of RNAV or
ATC RADAR monitoring.

CAUTION: Large tower
(1193 ft) left of course at
8.6 DME. Numerous buildings
with high intensity lighting.

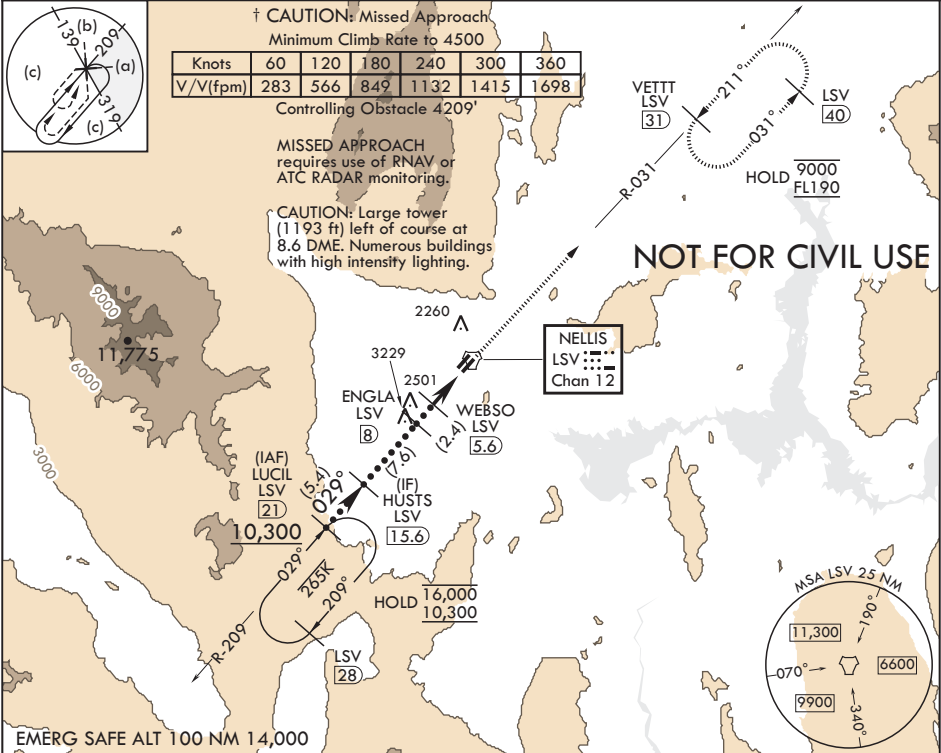

NOT FOR CIVIL USE

EMERG SAFE ALT 100 NM 14,000

9000 LSV R-031

VETT LSV 31

ELEV 1869

TDZE 1833

BCN

TWR

101 120 x 200
0.6% UP

0.4% UP

10,051 x 150

029°

ALS

CATEGORY	C	D	E
S-3R	2940-3	1107	(1100-3)
Ⓢ CIRCLING**	2940-3	1071	(1100-3) 3220-3 1351 (1400-3)
† BELOW MINIMA REQUIRES MISSED APPROACH CLIMB GRADIENT			
S-3R*	2300/50	467	(500-1)

HIRL all Rwys

LAS VEGAS, NEVADA

36°14'N - 115°02'W

NELLIS AFB (KLSV)

Amndt 10 10AUG23

HI-TACAN RWY 3R

SW-4, 07 AUG 2025 to 04 SEP 2025

SW-4, 07 AUG 2025 to 04 SEP 2025