

APP CRS
350°

Rwy Idg **10000**
TDZE **464**
Apt Elev **501**

RNAV (RNP) Z RWY 35L

LOUISVILLE MUHAMMAD ALI INTL (SDF')

RNP AR APCH - GPS.

T


For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.

ALSf-2

A

MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct DAMEN and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

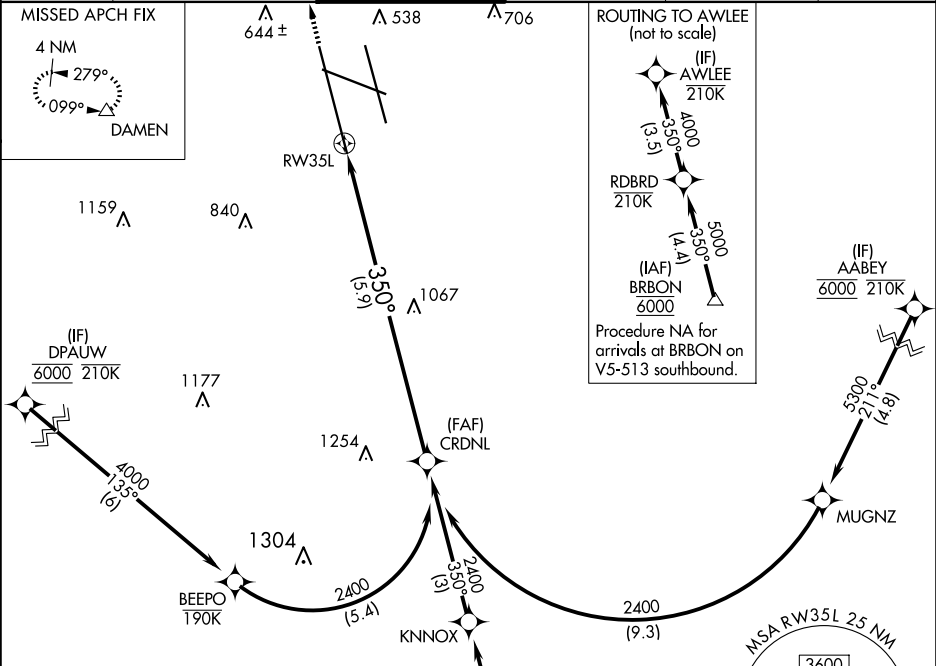

ELEV 501

D

TDZE 464

HIRL all Rwys
TDZ/CL Rwys
17L, 17R, 35L
and 35R

R-3704 A & B

1000

4000

DAMEN

SEE INSET FOR ROUTING TO AWLEE

(IF) AWLEE 210K

SEE INSET FOR ROUTING TO AWLEE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

CRDNL 2400

GP 3.00° TCH 59

RW35L

350°

2400

See planview for multiple IF locations.

5.9 NM

CATEGORY	A	B	C	D
RNP 0.11 DA	769/24	305 (300-½)		
RNP 0.30 DA	897/40	433 (400-¾)		

AUTHORIZATION REQUIRED