ILS or LOC RWY 5

MIDDLE GEORGIA RGNL (MCN)

LOC I-MCN	APP CRS	Rwy Idg	6221
109.5	054°	TDZE	344
		Apt Elev	354

DME and RADAR required.

DME from MCN VORTAC. Simultaneous reception of I-MCN and MCN DME required. For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000 and S-LOC 5 Cats C, D, and E visibilities to 1⅜ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 on heading 090° and DBN VORTAC R-314 to TRUKR/DBN VORTAC 15 DME/RADAR and hold.

ATIS	ATLANTA APP CON ★	MACON TOWER ★	GND CON	UNICOM
120.775	124.2 279.6	128.2 (CTAF) L 257.8	121.65	122.95

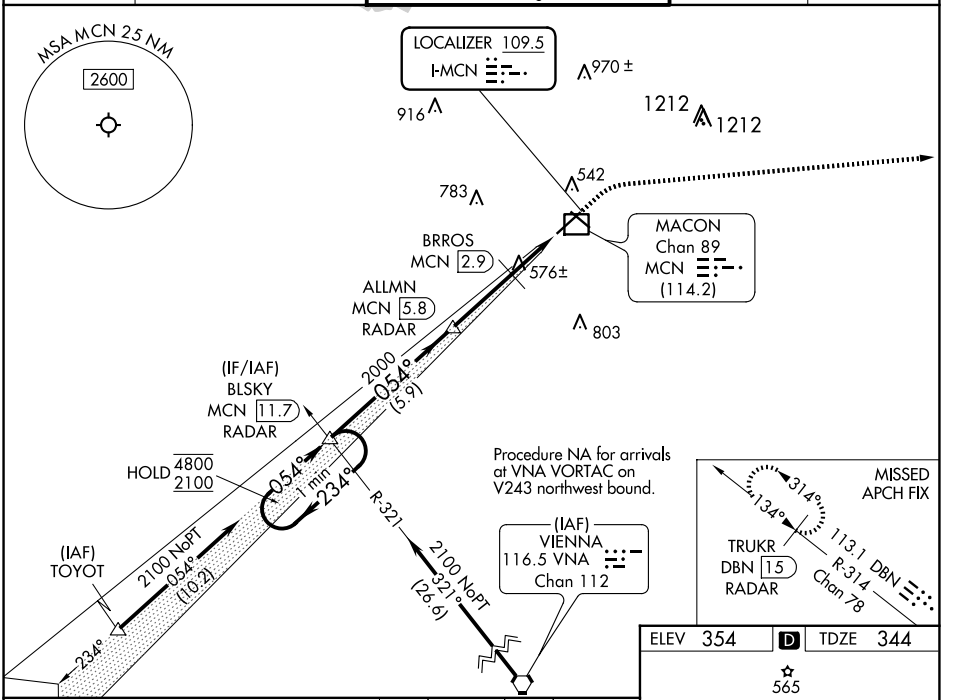

CATEGORY	A	B	C	D	E
S-ILS 5 *	544/24 200 (200-½)				
S-LOC 5	840/24 496 (500-½)		840/50 496 (500-1)		
C CIRCLING	900-1 546 (600-1)		920-1½ 566 (600-1½)	1120-2½ 766 (800-2½)	1180-3 826 (900-3)

HIRL Rwy 5-23 L
MIRL Rwy 14-32 L
REIL Rwys 23 and 32 L

SE-4, 07 AUG 2025 to 04 SEP 2025
SE-4, 07 AUG 2025 to 04 SEP 2025