


LOC I-EXW	APP CRS	Rwy Ldg	7815
108.3	259°	TDZE	548
		Apt Elev	565

ILS or LOC RWY 26

EASTERN WV RGNL/SHEPHERD FLD (MRB)

<div><div><div><div></div><div>NA</div></div></div><div>For inop ALS, increase S-ILS 26 Cat E visibility to ¾ SM and S-LOC 26 Cat E visibility to 1¼ SM.</div></div>			<div>MALSR</div> <div><div><div>AS</div><div><div></div><div></div><div></div><div></div><div></div></div></div></div>	MISSED APPROACH: Climb to 1100 then climbing left turn to 3300 direct MRB VORTAC and hold, continue climb-in-hold to 3300.	
ASOS	POTOMAC APP CON	MARTINSBURG TOWER ★	GND CON	CLNC DEL	CLNC DEL
119.925	126.825 239.025	124.3 (CTAF) 0 233.7	121.8 257.65	121.8 257.65	132.075 269.075 (When twr closed)

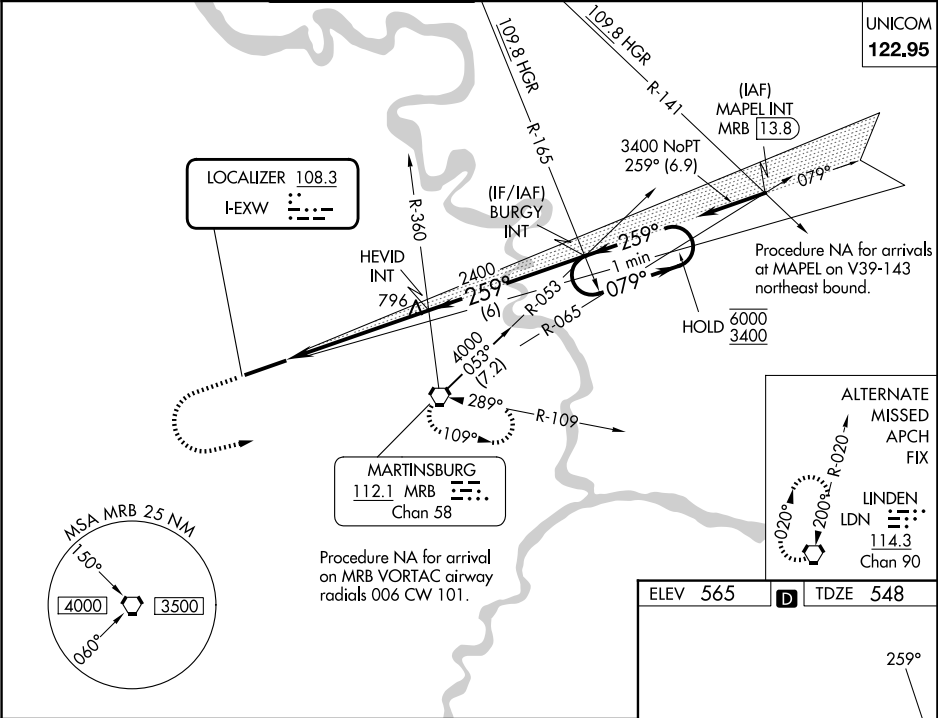

1100

3300

MRB

↑

↷

HEVID INT

2400

BURGY INT

2400

One Minute Holding Pattern

6000

3400

079°

259°

GS 3.00°

TCH 52

5.7 NM

6 NM

CATEGORY	A	B	C	D	E
S-ILS 26	748-½		200 (200-½)		
S-LOC 26	980-½	432 (500-½)	980-¾	432 (500-¾)	
CIRCLING	1100-1 535 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1320-2½ 755 (800-2½)	2180-3 1615 (1700-3)

REIL Rwy 8

HIRL Rwy 8-26

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54