



WAAS CH 56201 W27B	APP CRS 274°	Rwy Ldg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.			MISSED APPROACH: Climb to 2000 direct SUROY and hold.			
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below 2°C or above 54°C.						
ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 126.025 (When twr closed)	UNICOM 122.95

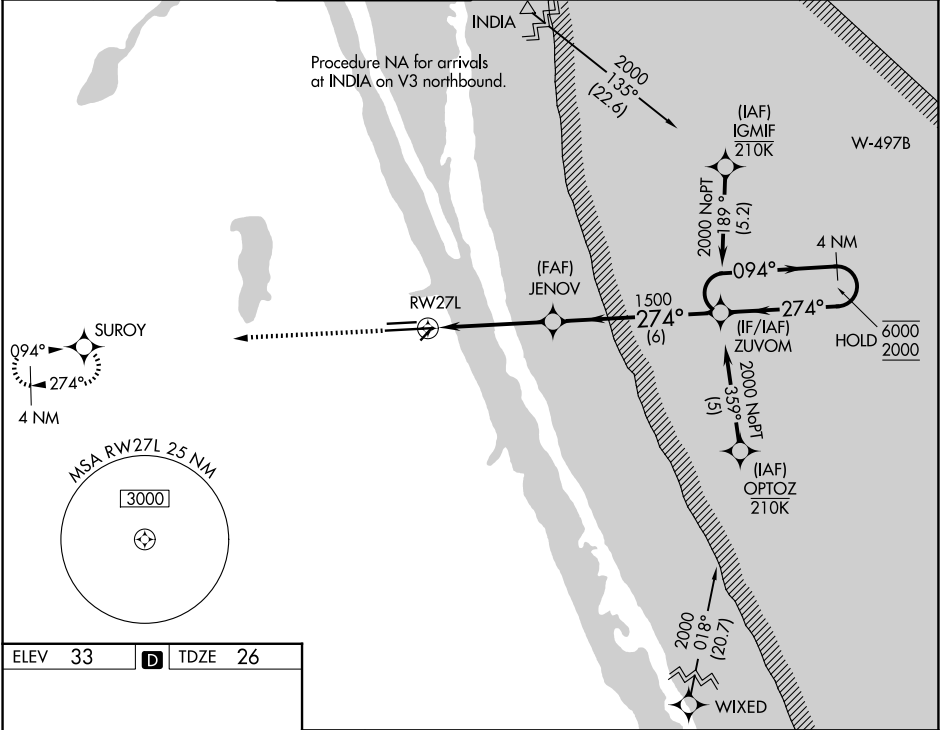

ELEV 33	D	TDZE 26
---------	----------	---------

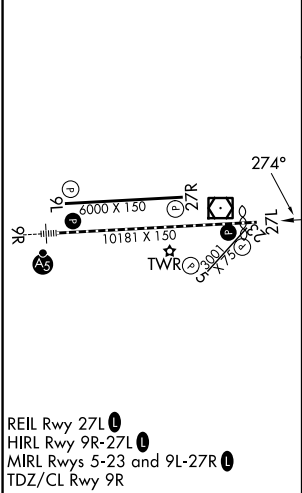

2000 SUOY		JENOV 1500		ZUVOM 4 NM Holding Pattern	
1.3 NM to RWY 27L		274°		094° 6000	
RWY 27L		1500		274° 2000	
1.3 NM		3.2 NM		6 NM	
CATEGORY	A	B	C	D	
LPV DA		226-¾	200 (200-¾)		
LNAV/ VNAV DA		318-⅞	292 (300-⅞)		
LNAV MDA	500-1	474 (500-1)	500-1⅓	474 (500-1⅓)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)	

SE-3, 07 AUG 2025 to 04 SEP 2025

SE-3, 07 AUG 2025 to 04 SEP 2025