# GWAVA TWO DEPARTURE (RNAV)



**TOP ALTITUDE: 5000**

RNAV 1-DME/DME/IRU or GPS.
RADAR required.

D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(Rwys 8L/R, 12, 26L/R)
121.8 348.6
(Rwys 9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
125.5 354.1

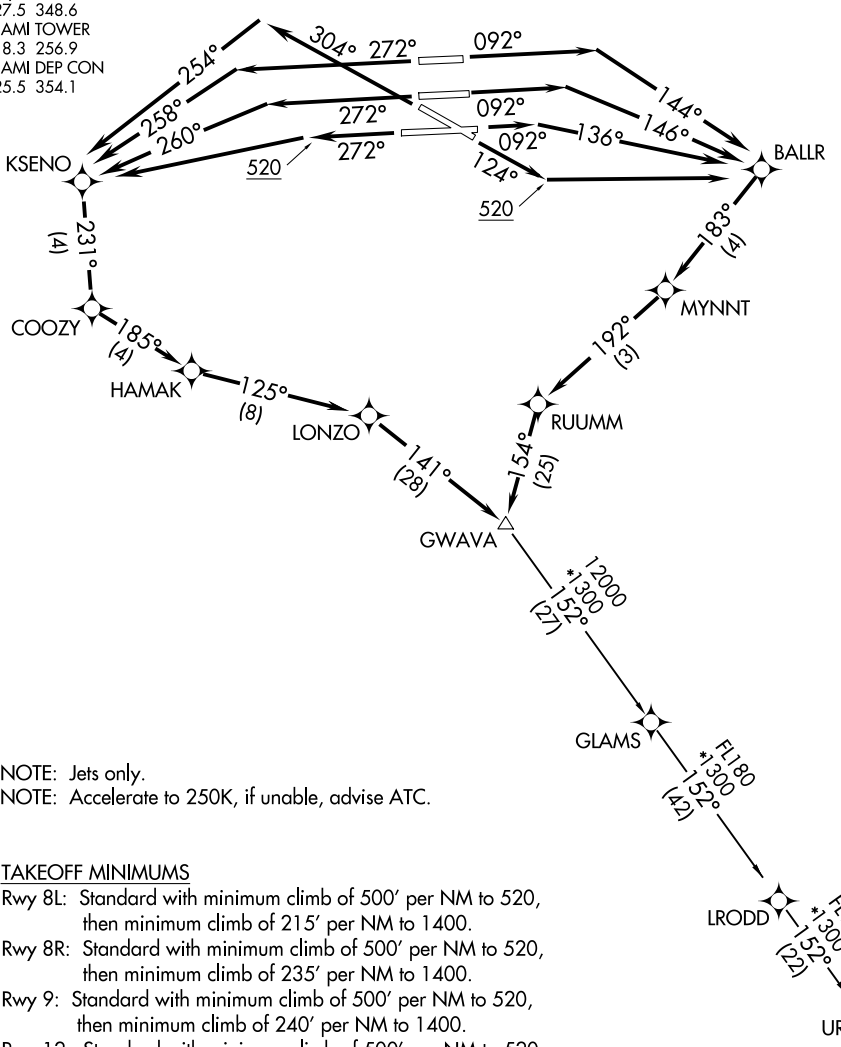


NOTE: Jets only.
NOTE: Accelerate to 250K, if unable, advise ATC.

TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500′ per NM to 520, then minimum climb of 215′ per NM to 1400.
Rwy 8R: Standard with minimum climb of 500′ per NM to 520, then minimum climb of 235′ per NM to 1400.
Rwy 9: Standard with minimum climb of 500′ per NM to 520, then minimum climb of 240′ per NM to 1400.
Rwy 12: Standard with minimum climb of 500′ per NM to 520, then minimum climb of 230′ per NM to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500′ per NM to 520.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.



SE-3, 07 AUG 2025 to 04 SEP 2025
SE-3, 07 AUG 2025 to 04 SEP 2025