

WAAS CH 69310 W10A	APP CRS 105°	Rwy Ldg TDZE 2869 Apt Elev 2872
--	------------------------	---



RNAV (GPS) RWY 10
MIDLAND INTL AIR AND SPACE PORT (M.A.F.)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 4700 direct
EASYY and hold.

ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7 (CTAF) 273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95
------------------------------	--	--	-------------------------------	----------------------------------	-------------------------

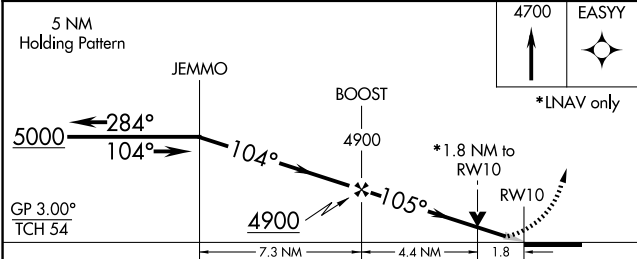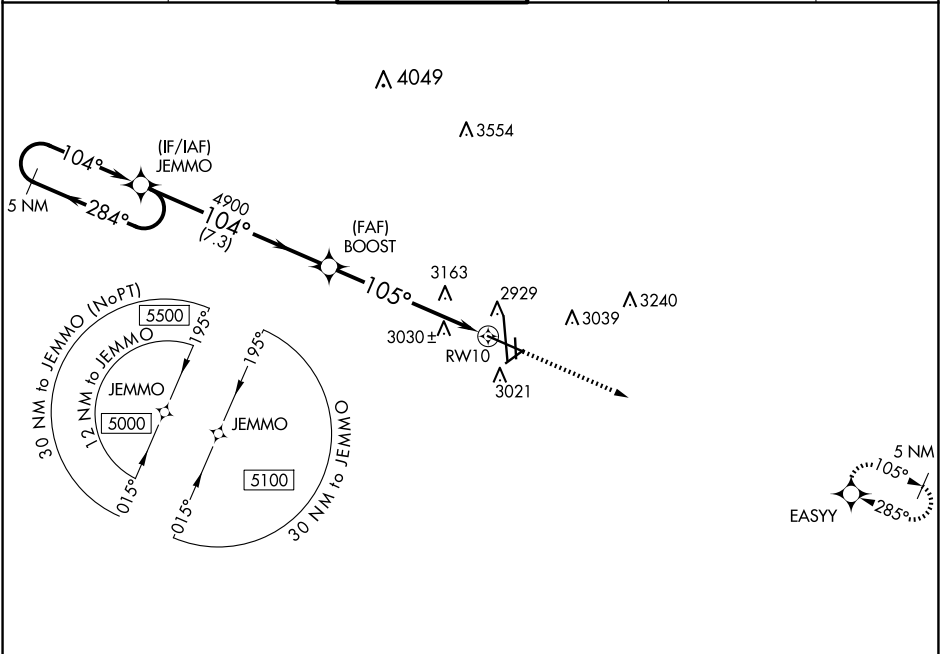

CATEGORY	A	B	C	D
LPV DA **	3069/24 200 (200-½)			
LNAV/VNAV DA	3394-1¼ 525 (600-1¼)			
LNAV MDA	3480/24 611 (700-½)	3480-1⅔ 611 (700-1⅔)		
CIRCLING	3480-1 608 (700-1)	3480-1¾ 608 (700-1¾)		

