

APP CRS
256°


Rwy Ldg
TDZE
Apt Elev

7867
683
729

RNAV (RNP) Y RWY 25L

GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.				MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.					
D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC

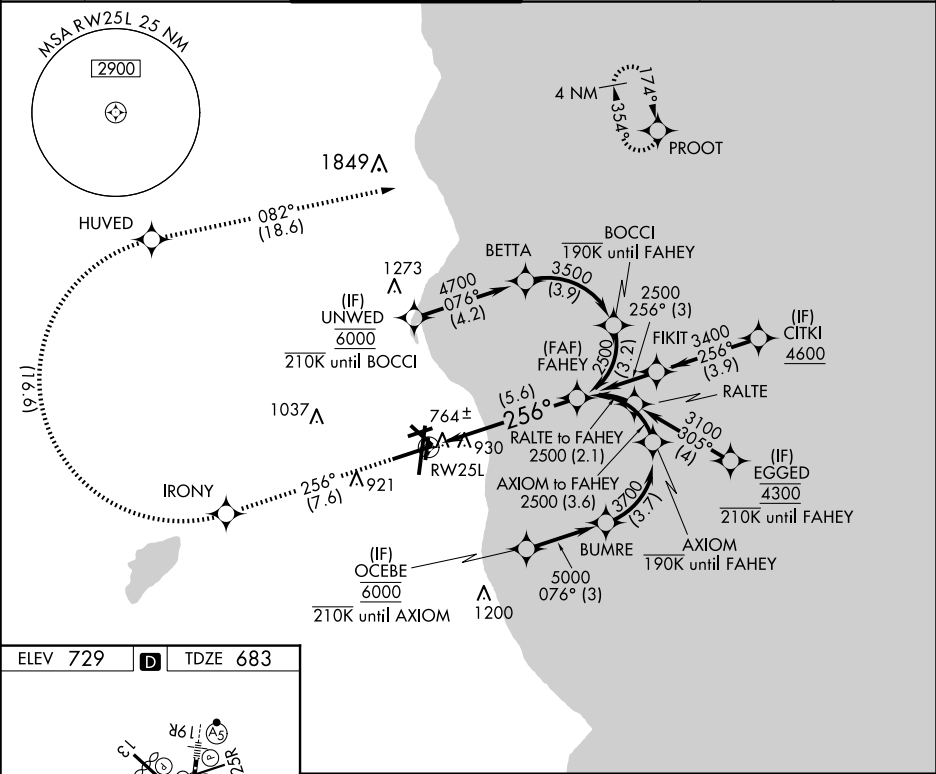

ELEV 729 TDZE 683

4797 X 100
8300 X 150
1.0% DOWN
0.4% UP
4182 X 150
256°

3700 IRONY HUVED PROOT

See planview for multiple IF locations.

RW25L

FAHEY

2500

256°

5.6 NM

GP 3.00°
TCH 47

CATEGORY	A	B	C	D
RNP 0.10 DA		1087-1 ³ / ₈	404 (400-1 ³ / ₈)	
RNP 0.30 DA		1256-2	573 (600-2)	

AUTHORIZATION REQUIRED