

LOC I-MOB	APP CRS	Rwy Idg	8502
109.9	147°	TDZE	215
		Apt Elev	219

ILS or LOC RWY 15
MOBILE RGNL (MOB)

▼ For inop ALS, increase S-ILS 15 Cat E visibility to RVR 4000 and S-LOC 15 Cats C/D/E visibility to 1½ mile.



▲ ASR *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSRL


AS

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 on heading 202° then on SJL VORTAC R-140 to SAINT/SJL 12.8 DME and hold.

ATIS	MOBILE APP CON ★	MOBILE TOWER ★	GND CON	CLNC DEL	UNICOM
124.75 257.85	118.5 269.3	118.3 (CTAF) 0 239.0	121.9 348.6	119.85	122.95

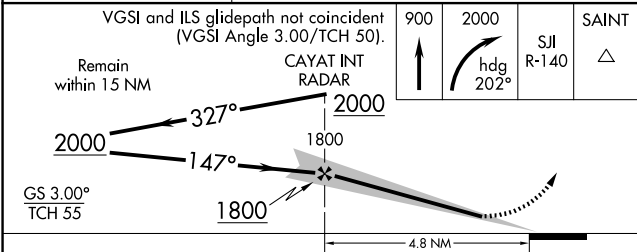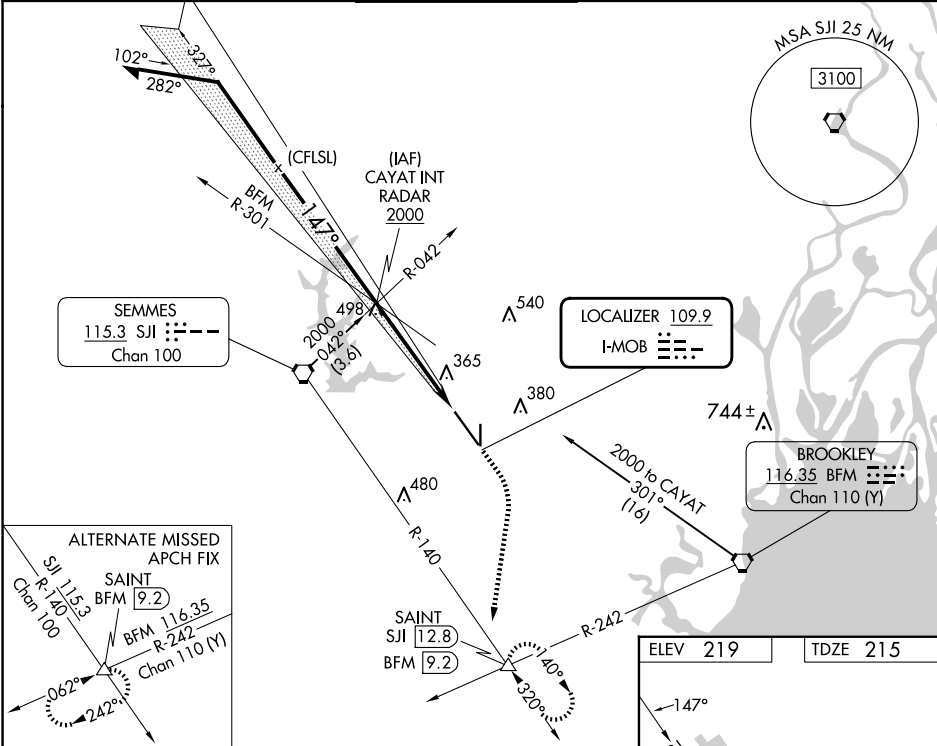

CATEGORY	A	B	C	D	E
S-ILS 15*	415/24 200 (200-½)				
S-LOC 15	700/24	485 (500-½)	700/50	485 (500-1)	
◻ CIRCLING	700-1½	481 (500-1½)	740-1½ 521 (600-1½)	780-2 561 (600-2)	NA

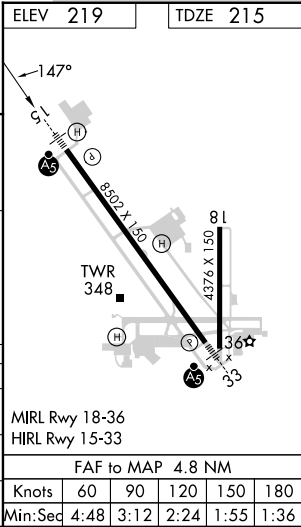

SE-4, 07 AUG 2025 to 04 SEP 2025

SE-4, 07 AUG 2025 to 04 SEP 2025