

WAAS
CH **56410**
W04A

APP CRS
042°

Rwy Idg **7504**
TDZE **78**
Apt Elev **79**

RNAV (GPS) RWY 4

MONROE RGNL (MLU)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling Rwy 14 NA at night.



ASR

** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct LURBY and hold.

ATIS 125.05	MONROE APP CON★ 118.15 290.475	MONROE TOWER★ 118.9 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

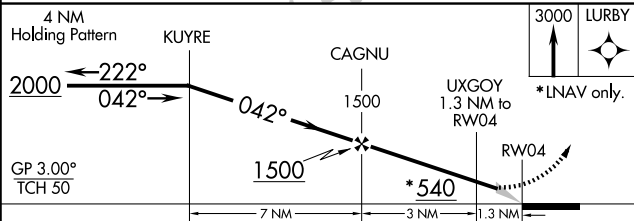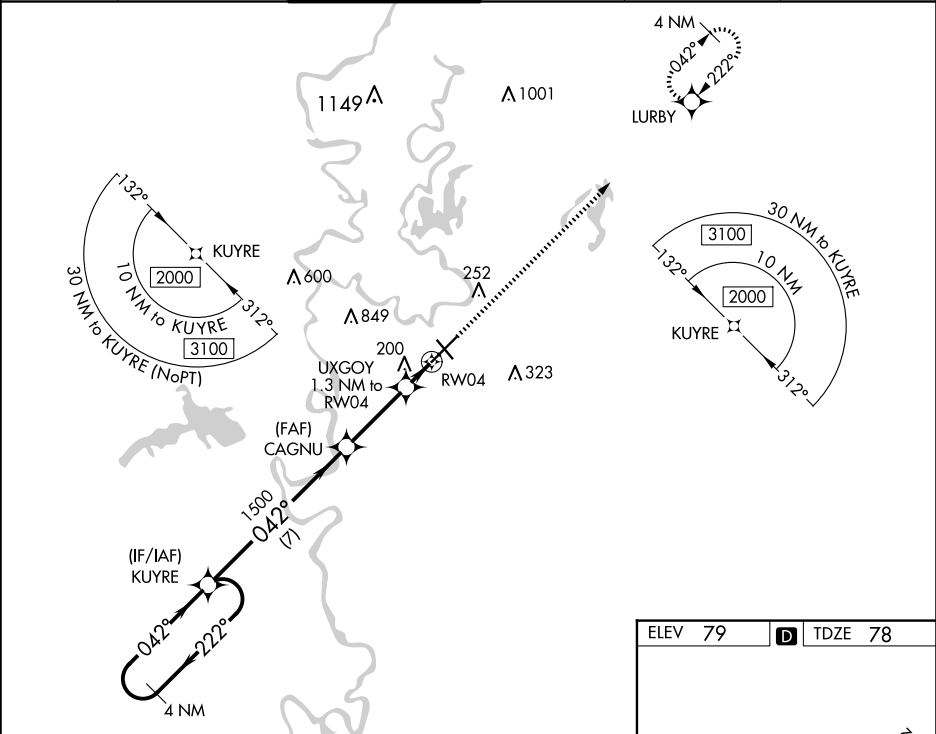

CATEGORY	A	B	C	D
LPV DA **		278/24	200 (200-½)	
LNAV/ VNAV		383/24	305 (400-½)	
LNAV MDA	460/24	382 (400-½)	460/35	382 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

ELEV 79 D TDZE 78

REIL Rwy 14 and 32
MIRL Rwy 14-32 0
HIRL Rwy 4-22 0