


SE-1, 07 AUG 2025 to 04 SEP 2025


D-ATIS 135.1  
CLNC DEL 126.05  
CPDLC  
GND CON  
121.9 348.6  
NASHVILLE TOWER  
118.6 257.8  
NASHVILLE DEP CON  
118.4 360.7

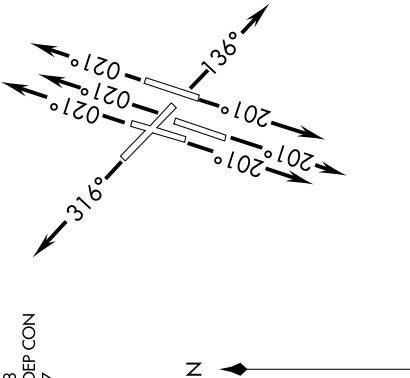

TAKEOFF MINIMUMS:  
Rwys 2C, 2L, 2R, 13, 20C, 20L, 20R, 31: Standard  
with minimum climb of 500' per NM to 1100.

TOP ALTITUDE:  
4000

- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: Radar required.
- NOTE: For Turbojet aircraft only.
- NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....  
TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....  
TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....  
TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....  
....expect radar vectors to CHPPY, then on track 115° to EVVAN. Maintain 4000,  
expect clearance to filed altitude within five (5) minutes after departure.

NOTE: Chart not to scale.

SE-1, 07 AUG 2025 to 04 SEP 2025