

WAAS CH 78411 W20A	APP CRS 201°	Rwy Ldg TDZE Apt Elev	7702 578 599
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 20R

NASHVILLE INTL (BNA)



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized with Rwy 20L. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cat D visibility to 1½ SM and LNAV Cats C and D visibility to 1¼ SM.

MALSF

MISSED APPROACH:
Climb to 3000 direct
RONLE and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
------------------------	--	---------------------------------------	-------------------------------	---------------------------	-------

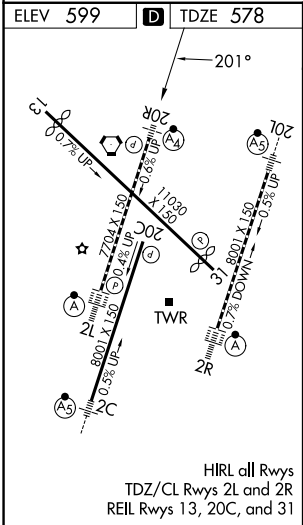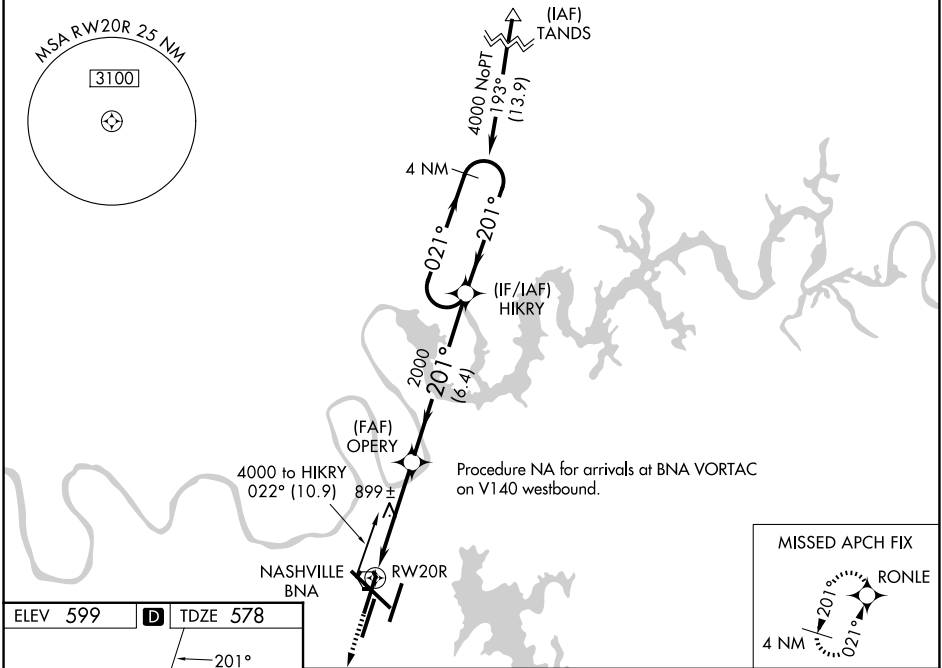

ELEV 599		D		TDZE 578	
3000		RONLE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).	
*LNAV only.		OPRY		HIKRY	
*1.6 NM to RW20R		2000		4000	
1.6 NM		2.8 NM		6.4 NM	
CATEGORY	A	B	C	D	
LPV DA	778/40		200 (200-¾)		
LNAV/VNAV DA	1038-1¾		460 (500-1¾)		
LNAV MDA	1160/40 582 (600-¾)		1160-1¾ 582 (600-1¾)		
CIRCLING	1160-1 561 (600-1)		1200-1¾ 601 (700-1¾) 1380-2½ 781 (800-2½)		