RNAV (RNP) Z RWY 32R

EPPLEY AIRFIELD (OMA)

APP CRS	Rwy Ldg	8500
322°	TDZE	981
	Apt Elev	985

RNP AR APCH. RF required.

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1¾ SM.

ALSF-2

MISSED APPROACH: Climb to 3300 direct HIKAM and track 320° to OTSEE and hold.

D-ATIS	OMAHA APP CON	OMAHA TOWER	GND CON	CLNC DEL
120.4	135.875 354.05	132.1 256.9	121.9	119.9

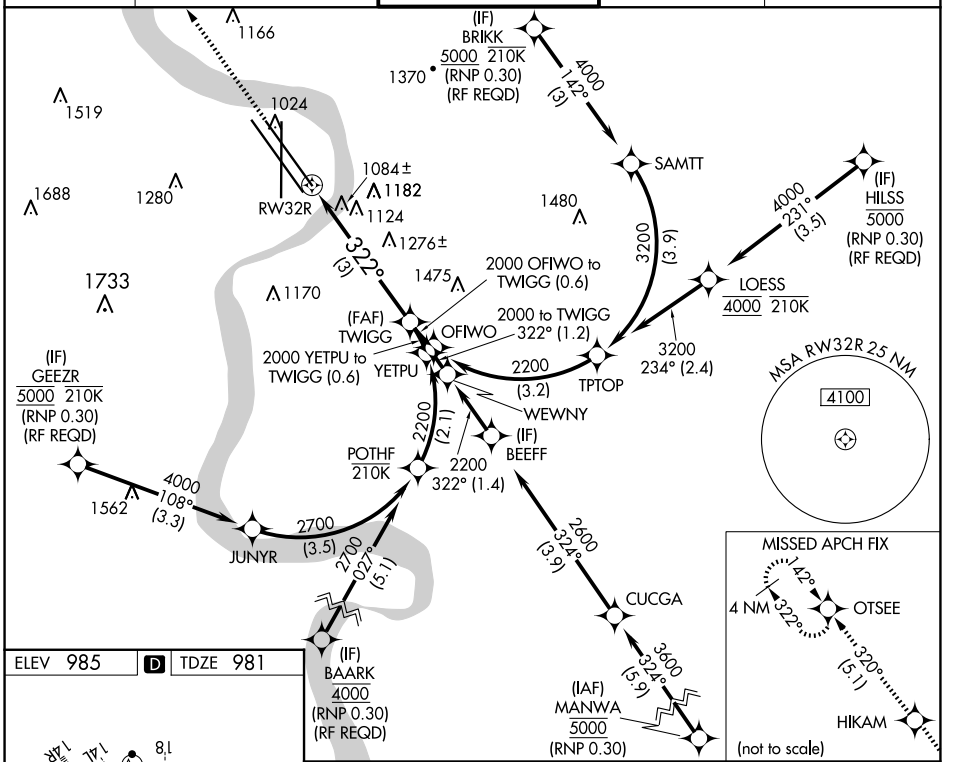

ELEV 985 D TDZE 981



HIRL all Rwys
TDZ/CL Rwys 14R and 32R

3300	HIKAM	tr 320°	OTSEE

See planview for multiple IF locations.

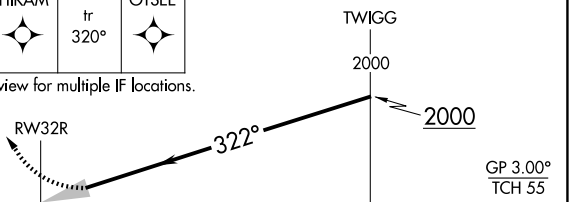

CATEGORY	A	B	C	D
RNP 0.11 DA		1313/26	332 (400-½)	
RNP 0.15 DA		1407/40	426 (500-¾)	
RNP 0.30 DA		1607-1⅜	626 (700-1⅜)	

AUTHORIZATION REQUIRED

NC-2, 07 AUG 2025 to 04 SEP 2025
NC-2, 07 AUG 2025 to 04 SEP 2025