PANAMA CITY, FLORIDA

RNAV (GPS) RWY 14R

WAAS CH **71278** **W14B**	APCH CRS **138°**	Rwy ldg **10,113** TDZE **15** Arpt Elev **17**

- (USAF)

TYNDALL AFB (KPAM)

RNP APCH

MISSED APPROACH: Climb to 600 then climbing left turn to 3000 direct NENCY and hold.

ATIS★	APP CON/DEP CON	TOWER★	GND CON	CLNC DEL	ASR/PAR
254.4	**119.775 317.45** BLW 5000' **124.15 338.35** ABV 5000'	**133.95 263.15**	**121.9 259.3**	**118.05 348.7**	

For uncompensated Baro-VNAV systems, Procedure NA below 15°C (59°F) or above 54°C (130°F).

Average Cold Temperature based on standard -30.00°C ISA deviation.

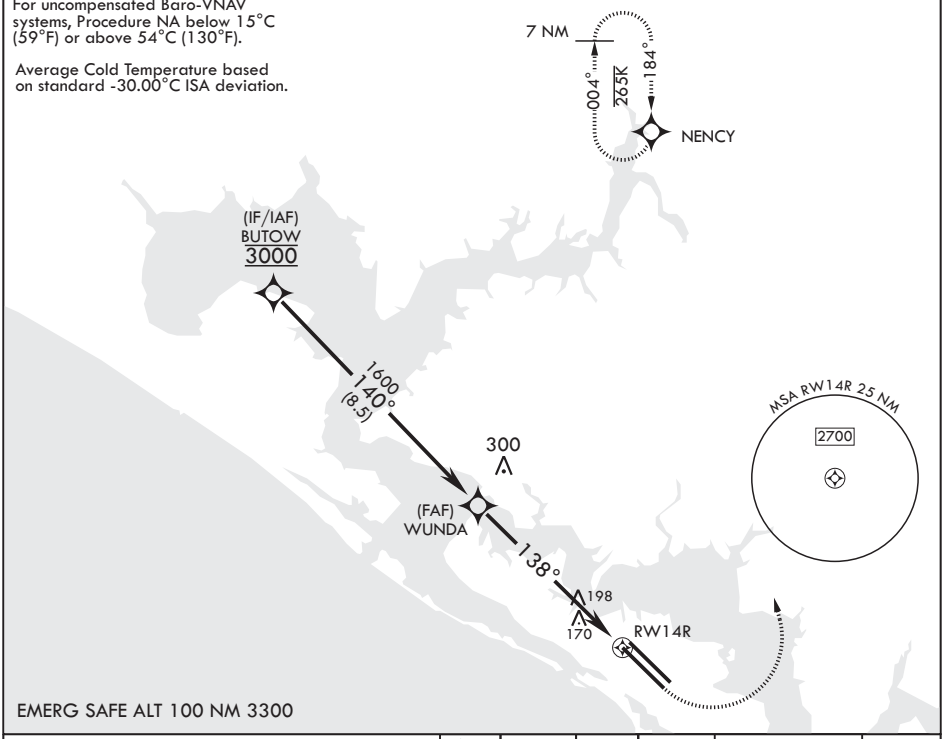

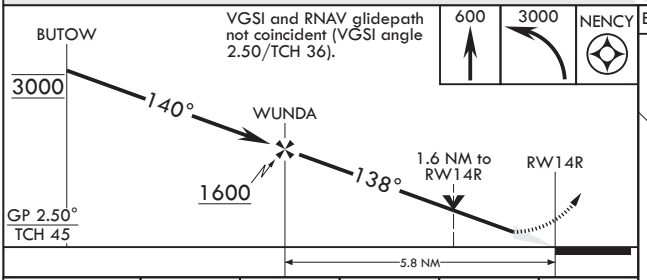

VGSI and RNAV glidepath not coincident (VGSI angle 2.50/TCH 36).

600 3000 NENCY

ELEV 17 TDZE 15

Rwy 32L ldg 9135'



CATEGORY	A	B	C	D	E
LPV DA	215-¾		200	(200-¾)	
LNAV/VNAV DA	420-1⅛		405	(500-1⅛)	
LNAV MDA	500-1	485 (500-1)	500-1⅜	485	(500-1⅜)
C CIRCLING	540-1	523 (600-1)	540-1½ 523 (600-1½)	580-2 563 (600-2)	620-2¼ 603 (700-2¼)

HIRL all Rwys
Recommend Rwy 14L-32R for apch end engagement of A-Gear.

SE-3, 07 AUG 2025 to 04 SEP 2025
SE-3, 07 AUG 2025 to 04 SEP 2025