


WAAS CH <b>63104</b> <b>W25A</b>	APP CRS <b>249°</b>	Rwy Idg TDZE Apt Elev	<b>6880</b> <b>1725</b> <b>1744</b>
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 25

PIERRE RGNL (PIR)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below -26°C or above 54°C.		MISSED APPROACH: Climb to 4000 direct HOSTR and hold.	
ASOS <b>119.025</b>	MINNEAPOLIS CENTER <b>125.1 269.1</b>	CTAF <b>122.70</b>	UNICOM <b>122.95</b>

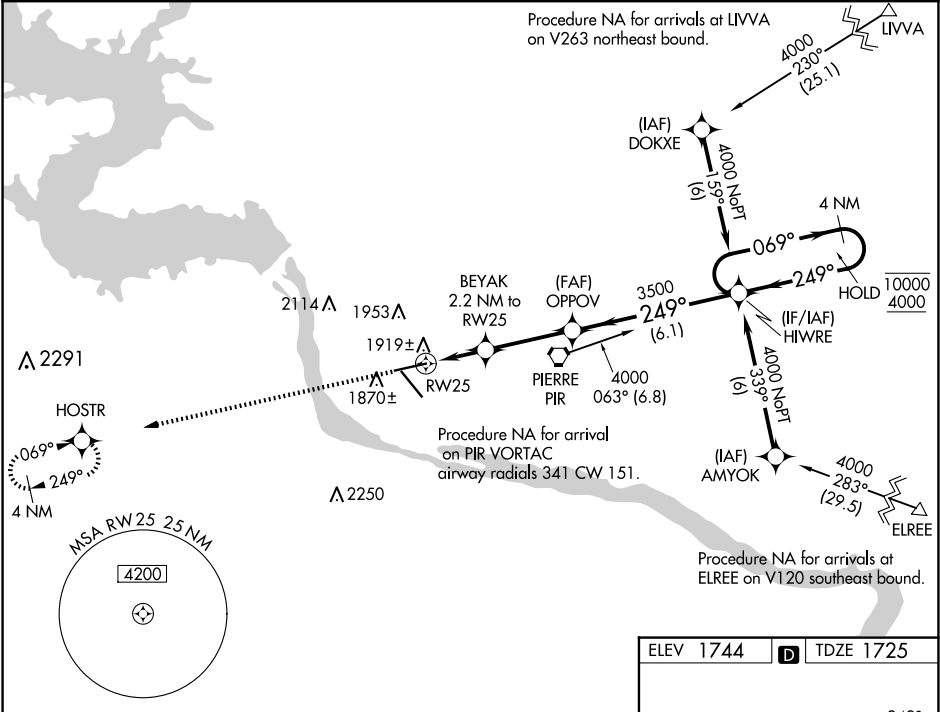

4000	HOSTR	BEYAK 2.2 NM to RW25	OPPOV 3500	HIWRE	4 NM Holding Pattern
*LNAV only		*1.3 NM to RW25			
		2440*	3500		10000 4000
		GP 3.00° TCH 54			
CATEGORY	A	B	C	D	
LPV DA	1975-1 250 (300-1)				
LNAV/VNAV DA	2179-1¾ 454 (500-1¾)				
LNAV MDA	2180-1	455 (500-1)	2180-1¼ 455 (500-1¼)	2180-1½ 455 (500-1½)	
CIRCLING	2240-1 496 (500-1)	2300-1 556 (600-1)	2400-1¾ 656 (700-1¾)	2460-2¼ 716 (800-2¼)	

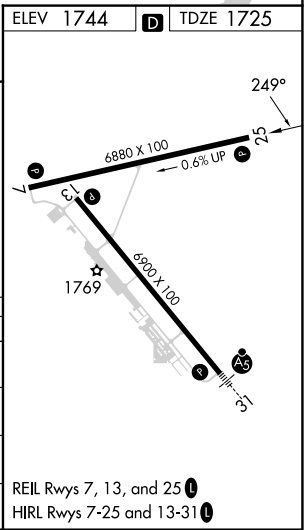

NC-1, 07 AUG 2025 to 04 SEP 2025

NC-1, 07 AUG 2025 to 04 SEP 2025