


WAAS CH 65623 W31A	APP CRS 313°	Rwy Idg TDZE 1720 Apt Elev 1744
--	------------------------	---

RNAV (GPS) RWY 31

PIERRE RGNL (PIR)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.	MALSR 	MISSED APPROACH: Climb to 4000 direct FASIP and hold.
---	-----------	---

ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.70	UNICOM 122.95
------------------------	--	-----------------------	-------------------------

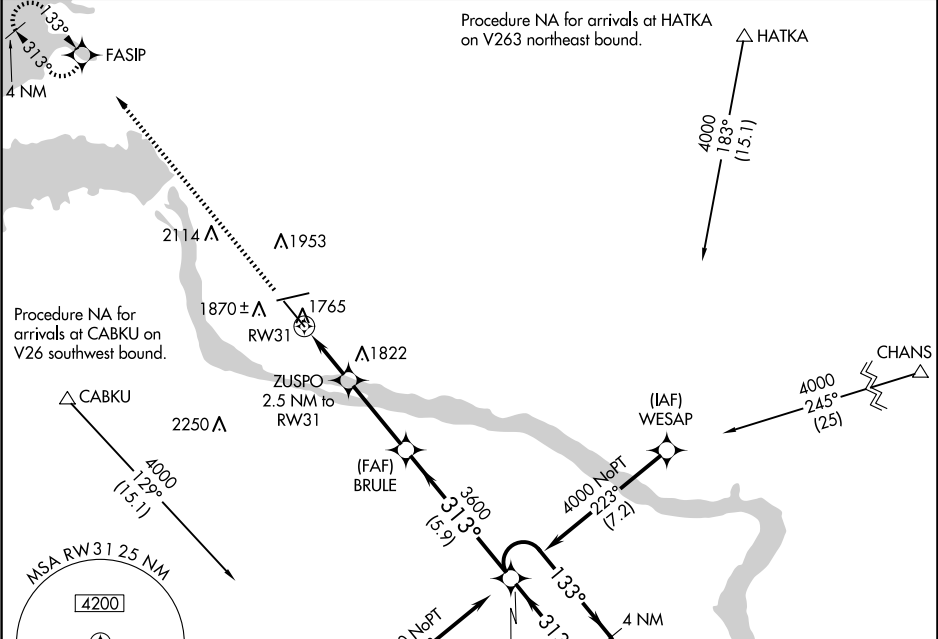

ELEV 1744		TDZE 1720	
*LNAV only		HOGEX	
*1 NM to RW31		4 NM Holding Pattern	
1 NM		GP 3.00°	
1.5 NM		TCH 56	
3.2 NM			
5.9 NM			
CATEGORY	A	B	C
LPV DA	1920-½	200 (200-½)	
LNAV/VNAV DA	1970-½	250 (300-½)	
LNAV MDA	2020-½	300 (300-½)	
CIRCLING	2240-1 496 (500-1)	2300-1 556 (600-1)	2400-1¾ 656 (700-1¾)

