


WAAS CH <b>70306</b> <b>W11A</b>	APP CRS <b>110°</b>	Rwy Idg TDZE <b>76</b> Apt Elev <b>76</b>	<b>7200</b>
--	------------------------	---	-------------

RNAV (GPS) RWY 11  
PORTLAND INTL JETPORT (PWM)

RNP APCH - GPS.			ALSF-2	MISSED APPROACH: Climb to 3000 direct SAPPE and hold, continue climb-in-hold to 3000.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.					
ATIS 119.05	PORTLAND APP CON ★ 119.75 269.35	PORTLAND TOWER ★ 120.9 0 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95

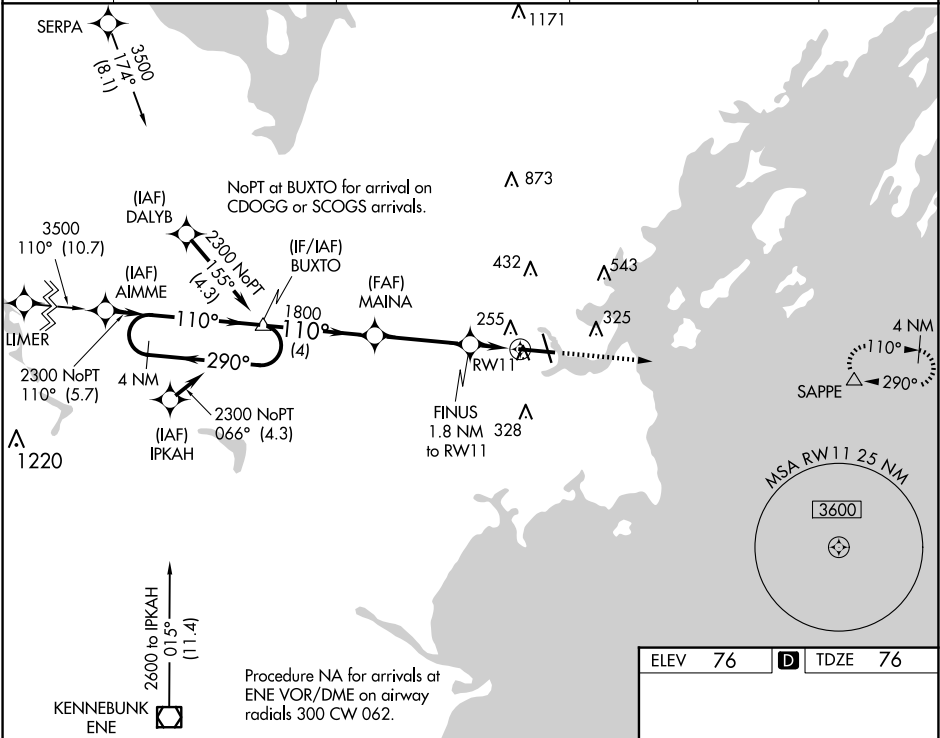

4 NM Holding Pattern BUXTO		3000	SAPPE
2300 ← 290° 110° →		↑	△
GP 3.00° TCH 51		* LNAV only	
1800		RW11	
4 NM		3.5 NM	
1800		* 700	
CATEGORY		A	
LPV DA		276/18 200 (200-½)	
LNAV/VNAV DA		456/40 380 (400-¾)	
LNAV MDA		520/24 444 (500-½)	
CIRCLING		620-1 640-1 740-1¾ 860-2½	
		544 (600-1) 564 (600-1) 664 (700-1¾) 784 (800-2½)	

