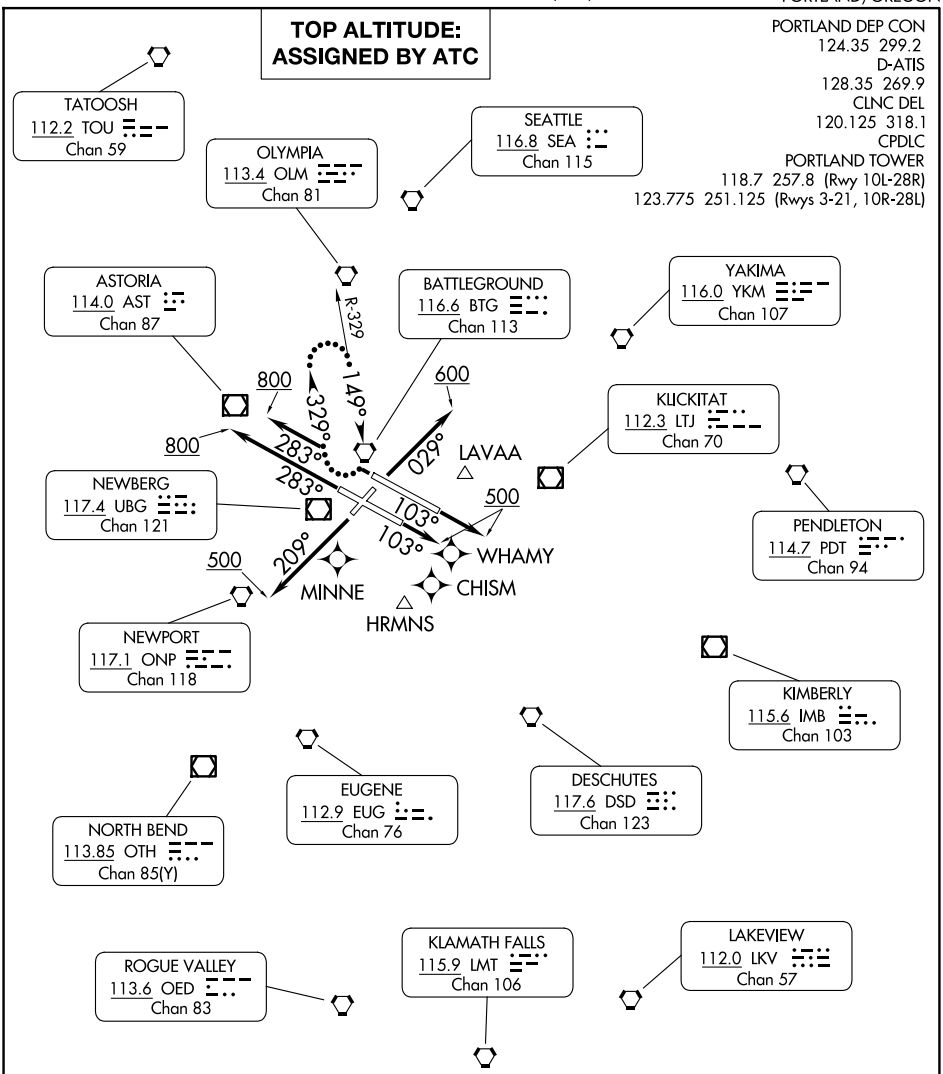

TAKEOFF MINIMUMS

Rwy 3: Standard with minimum climb of 375′ per NM to 5300.
Rwy 10L: Standard with minimum climb of 350′ per NM to 5900.
Rwy 10R: Standard with minimum climb of 400′ per NM to 5000.
Rwy 21: Standard with minimum climb of 430′ per NM to 4000.
Rwy 28L: Standard with minimum climb of 375′ per NM to 4500.
Rwy 28R: Standard with minimum climb of 340′ per NM to 5400.

NOTE: RADAR required.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

NW-1, 07 AUG 2025 to 04 SEP 2025
NW-1, 07 AUG 2025 to 04 SEP 2025