


WAAS CH <b>53531</b> <b>W26A</b>	APP CRS <b>260°</b>	Rwy Ldg <b>10496</b> TDZE <b>4659</b> Apt Elev <b>4729</b>
--	------------------------	--


RNAV (GPS) RWY 26L

PUEBLO MEML (PUB)

RNP APCH-GPS.			MISSED APPROACH: Climb to 7000 direct MERTZ and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.					
ATIS 125.25	DENVER APP CON ★ 120.1 290.5	PUEBLO TOWER ★ 119.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 120.9	UNICOM 122.95

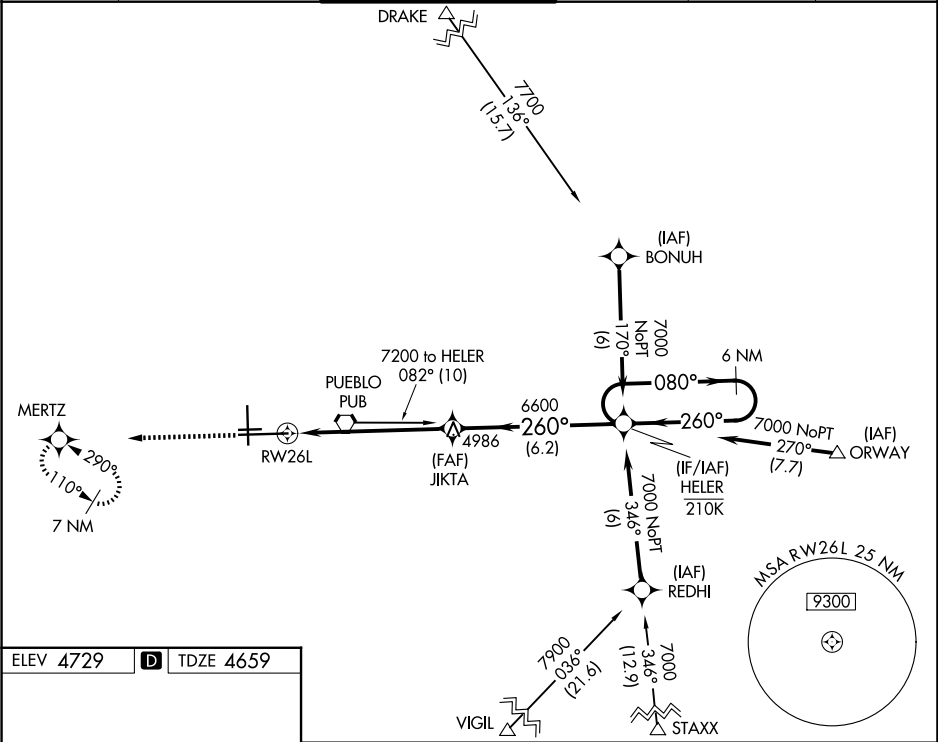

ELEV 4729	D	TDZE 4659
-----------	---	-----------

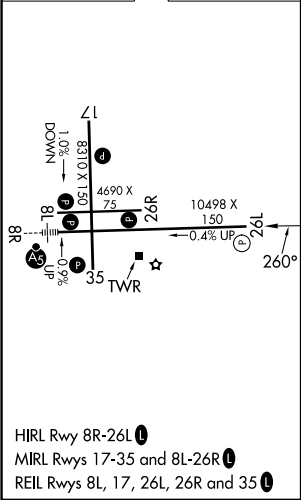

7000

↑

MERTZ

✦

HELER

6 NM Holding Pattern

080° →

← 260°

7000

JIKTA

6600

260°

6600

RW26L

\*1.4 NM to RW26L

1.4

4.5 NM

6.2 NM

\*LNAV only

GP 3.00°

TCH 60

CATEGORY	A	B	C	D
LPV DA	4859-3/4 200 (200-3/4)			
LNAV/VNAV DA	4979-1 320 (300-1)			
LNAV MDA	5100-1	441 (400-1)	5100-1 3/8	441 (400-1 3/8)
CIRCLING	5340-1	611 (700-1)	5580-2 1/2 851 (900-2 1/2)	5800-3 1071 (1100-3)