



VORTAC RBL 115.7 Chan 104	APP CRS 328°	Rwy Idg 5431 TDZE 352 Apt Elev 352
---	------------------------	---

VOR RWY 33
RED BLUFF MUNI (RBL)

When local altimeter setting not received, use Redding altimeter setting and increase all MDAs 80 feet and all Cat C/D visibilities ¼ SM.

MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 direct RBL VORTAC and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

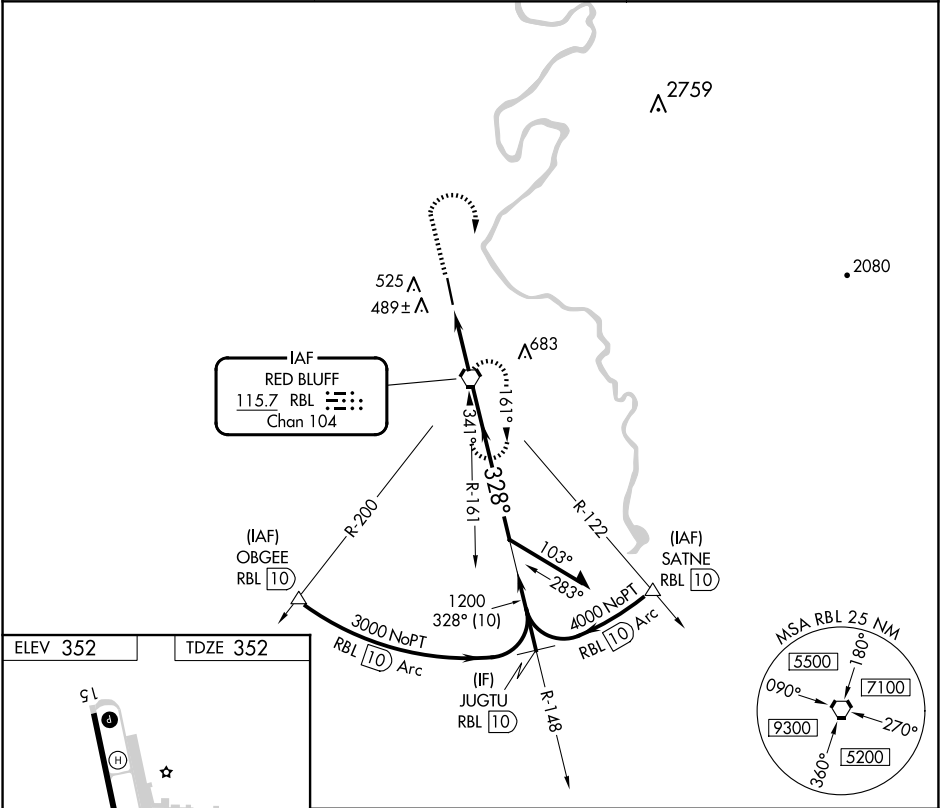

1500	2000	RBL	RBL VORTAC	2300	148°	2100	328°	1200	2.83°	TCH 40	2.7 NM	2.7 NM
Remain within 10 NM												
CATEGORY	A		B		C		D					
S-33	740-1 388 (400-1)								740-1¼ 388 (400-1¼)			
CIRCLING	880-1 528 (600-1)				900-1½ 548 (600-1½)				1060-2¼ 708 (800-2¼)			