
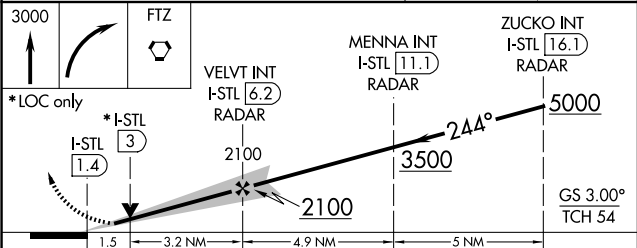
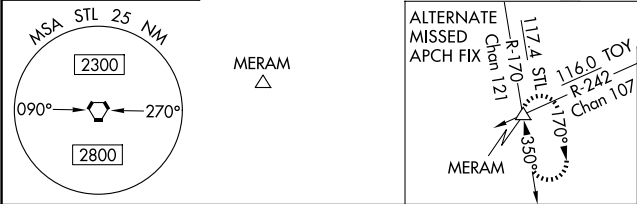
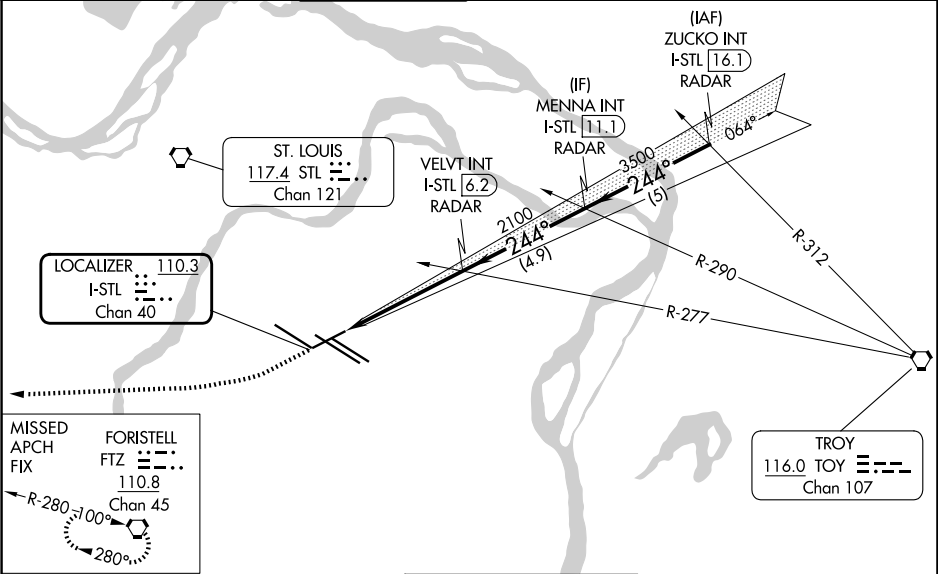


LOC/DME I-STL <b>110.3</b> Chan <b>40</b>	APP CRS <b>244°</b>	Rwy Ldg TDZE <b>7603</b> <b>534</b> Apt Elev <b>618</b>
---	------------------------	--


ILS or LOC RWY 24

ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry.				MAL S 	MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.	
▼ Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1½ SM.						
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC



ELEV 618	<b>D</b>	TDZE 534
Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150		



CATEGORY	A	B	C	D	E	HIRL all Rwys TDZ/CL Rwys 11, 12L, 12R, 29, and 30R
S-ILS 24	734/40 200 (200-¾)					
S-LOC 24	1080/40	546 (500-¾)	1080-1⅜	546 (500-1⅜)		

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36