

APP CRS	Rwy Ldg	8505
217°	TDZE	770
	Apt Elev	809



RNAV (RNP) Z RWY 22
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS. Authorization required.
From BRSQT: Min RNP 0.50. From NADDE: RF.


MISSED APPROACH: (Do not exceed 195K until IMIKE) Climb to 3100 direct IMIKE and on track 137° to EMBOW and hold.

For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

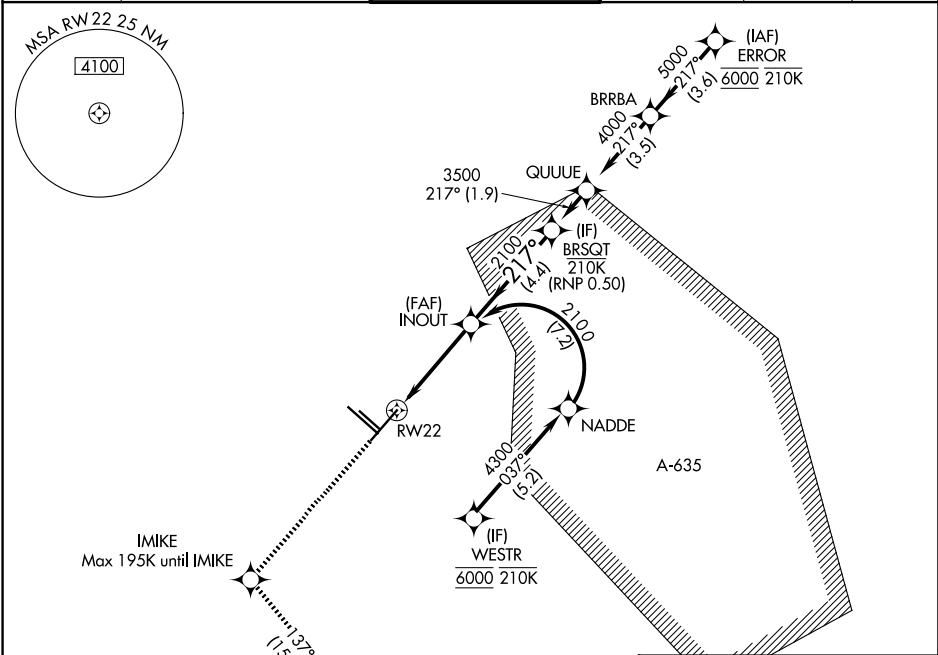

3100	IMIKE	EMBOW
↑	✱	△
	tr 137°	

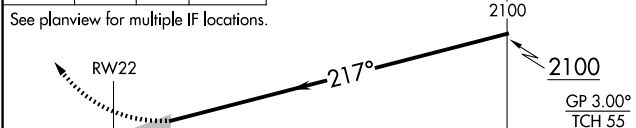

CATEGORY	A	B	C	D
RNP 0.15 DA		1068-7/8	298 (300-7%)	
RNP 0.30 DA		1220-13/8	450 (500-13%)	

AUTHORIZATION REQUIRED

