

WAAS CH 97314 W19A	APP CRS 186°	Rwy Ldg TDZE 47 Apt Elev 50
--	------------------------	---

RNAV (GPS) RWY 19

SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH-GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
When local altimeter setting not received, use Hilton Head Island altimeter setting and increase LPV DA to 378 feet; increase LNAV/VNAV DA to 532 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Hilton Head Island altimeter setting.

MISSED APPROACH: Climb to 2500 direct TERBE and hold.

ATIS 123.75	SAVANNAH APP CON ★ 125.3 371.875	SAVANNAH TOWER ★ 125.975 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95
-----------------------	--	---	-------------------------------	-----------------------------------	-------------------------

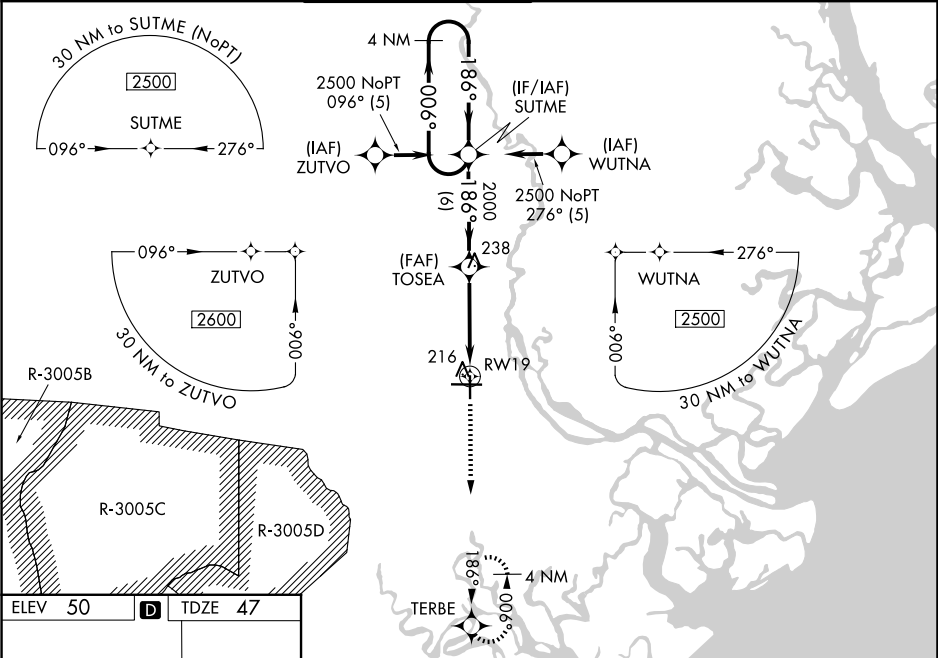

ELEV 50	D	TDZE 47
2500 TERBE		
*LNAV only.		
TOSEA 2000		
RWY 19 2000		
1.2 NM 4.7 NM 6 NM		
SUTME 4 NM Holding Pattern		
GP 3.00° TCH 52		
CATEGORY	A	B C D
LPV DA	312-1	265 (300-1)
LNAV/VNAV DA	466-1½	419 (500-1½)
LNAV MDA	480-1 433 (500-1)	480-1½ 433 (500-1½)
CIRCLING	520-1 470 (500-1)	740-2 690 (700-2) 740-2½ 690 (700-2½)