
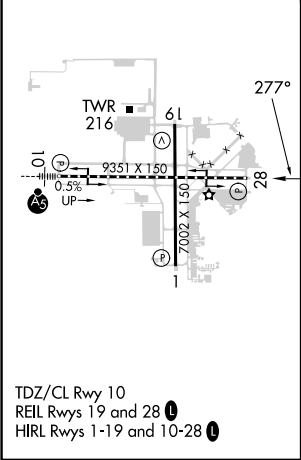


WAAS CH 40015 W28A	APP CRS 277°	Rwy Ldg 9351 TDZE 50 Apt Elev 50
--	------------------------	---

RNAV (GPS) Z RWY 28
SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct TLEE and hold.
<div><div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).</div></div>	

ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95
-----------------------	---	--	-------------------------------	-----------------------------------	-------------------------

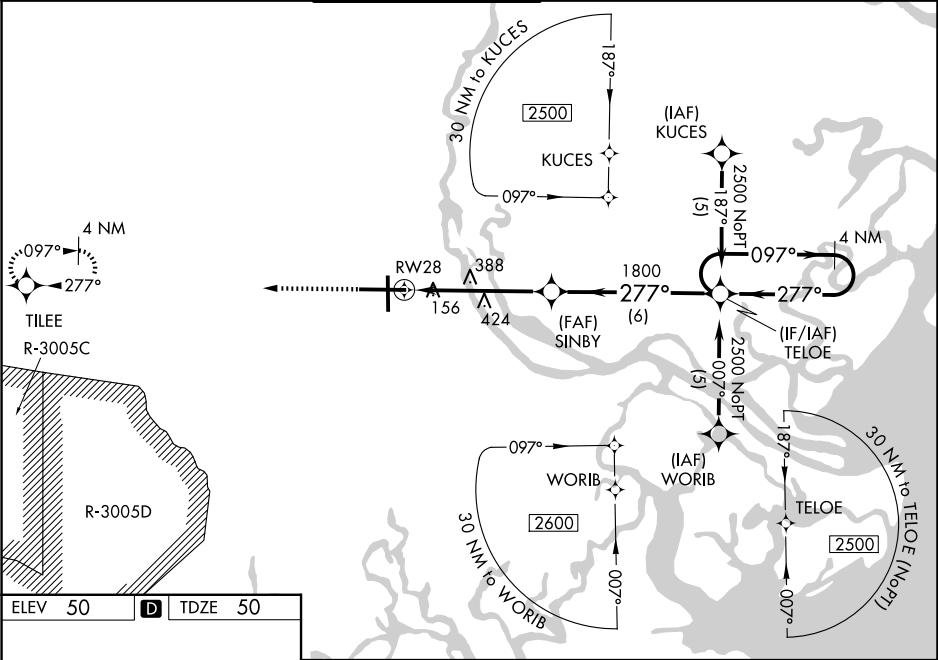

2600 TLEE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).		TELOE		4 NM Holding Pattern	
*LNAV only.		SINBY		1800		277°	
RW28		1.8 NM to RW28		3.5 NM		6 NM	
CATEGORY		A		B		C	
LPV DA		307-1		257 (300-1)			
LNAV/VNAV DA		431-1¼		381 (400-1¼)			
LNAV MDA		680-1		630 (700-1)		680-1¾ 630 (700-1¾)	
CIRCLING		680-1		630 (700-1)		740-2 690 (700-2) 740-2¼ 690 (700-2¼)	