VORTAC SAV	APP CRS	Rwy Ldg	7002
115.95	181°	TDZE	47
Chan 106 (Y)		Apt Elev	50

VOR/DME or TACAN RWY 19

SAVANNAH/HILTON HEAD INTL (SAV)

Visibility reduction by helicopters NA. When local altimeter setting not received, use Hilton Head Island altimeter setting and increase all MDA 80 feet; increase S-19 Cats C/D visibility ¼ SM and Cat E visibility ½ SM; increase Circling Cats C/D visibility ¼ SM. VDP NA when using Hilton Head Island altimeter setting.

MISSED APPROACH: Climb to 800 then climbing left turn to 4000 via heading 330° and SAV R-001 to TILLS/20 DME and hold.

ATIS	SAVANNAH APP CON★	SAVANNAH TOWER ★	GND CON	CLNC DEL	UNICOM
123.75	125.3 371.875	125.975 (CTAF) L 257.8	121.9 348.6	119.55 291.775	122.95

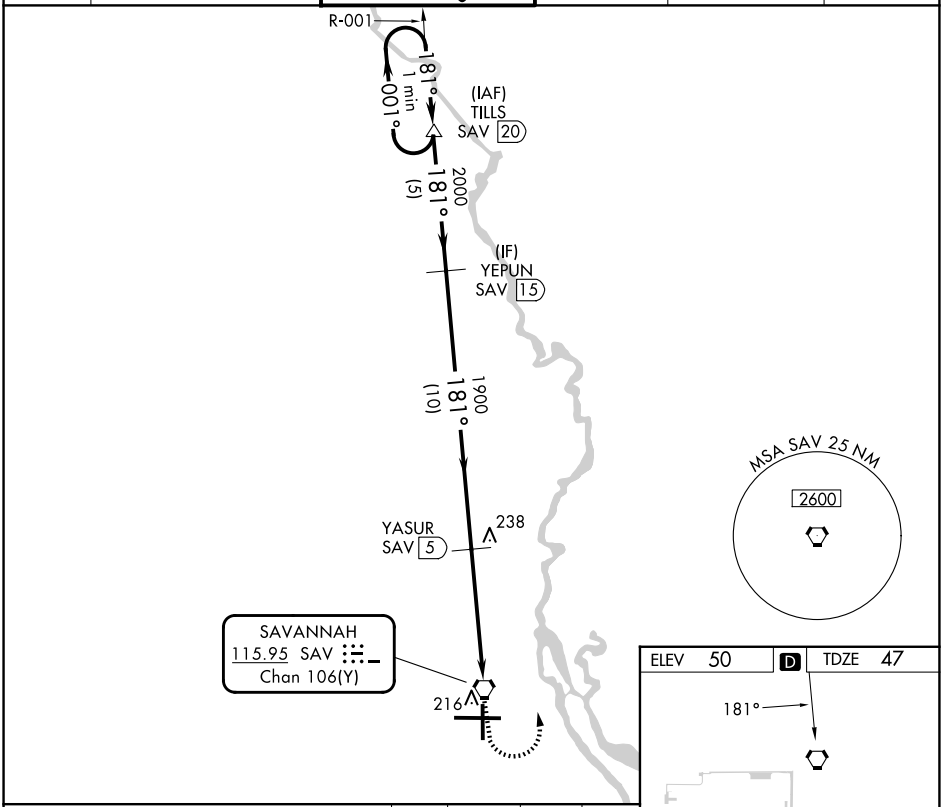

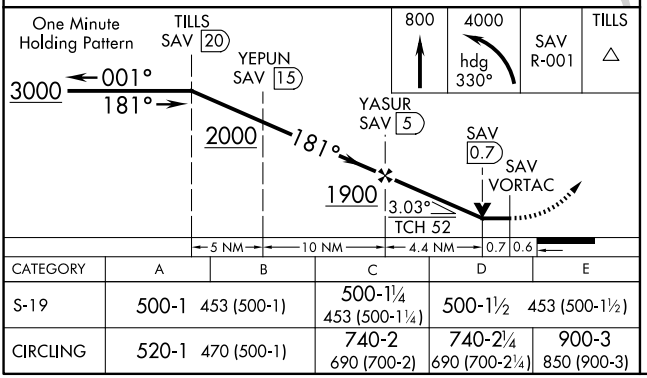

CATEGORY	A	B	C	D	E
S-19	500-1	453 (500-1)	500-1¼ 453 (500-1¼)	500-1½	453 (500-1½)
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)	900-3 850 (900-3)

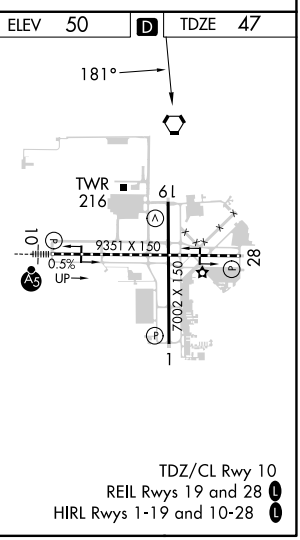

TDZ/CL Rwy 10
REIL Rwys 19 and 28 L
HIRL Rwys 1-19 and 10-28 L

SE-4, 07 AUG 2025 to 04 SEP 2025
SE-4, 07 AUG 2025 to 04 SEP 2025