

NDB HEU <u>356</u>	APP CRS 225°	Rwy Idg TDZE Apt Elev	7001 378 378
------------------------------	------------------------	-----------------------------	---

NDB RWY 22

SCHENECTADY COUNTY (SCH)




ANA

Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Albany altimeter setting and increase all MDA 40 feet, and increase Circling Cat A/D visibility ¼ mile. Circling Rwy 10 NA at night.


MISSED APPROACH:
Climbing right turn to 3100
in HEU NDB holding pattern.

AWOS-3 119.275	ALBANY APP CON 132.825 263.075	SCHENECTADY TOWER ★ 121.3 (CTAF) 0 321.1	GND CON 121.9	UNICOM 122.95
-------------------	-----------------------------------	---	------------------	------------------

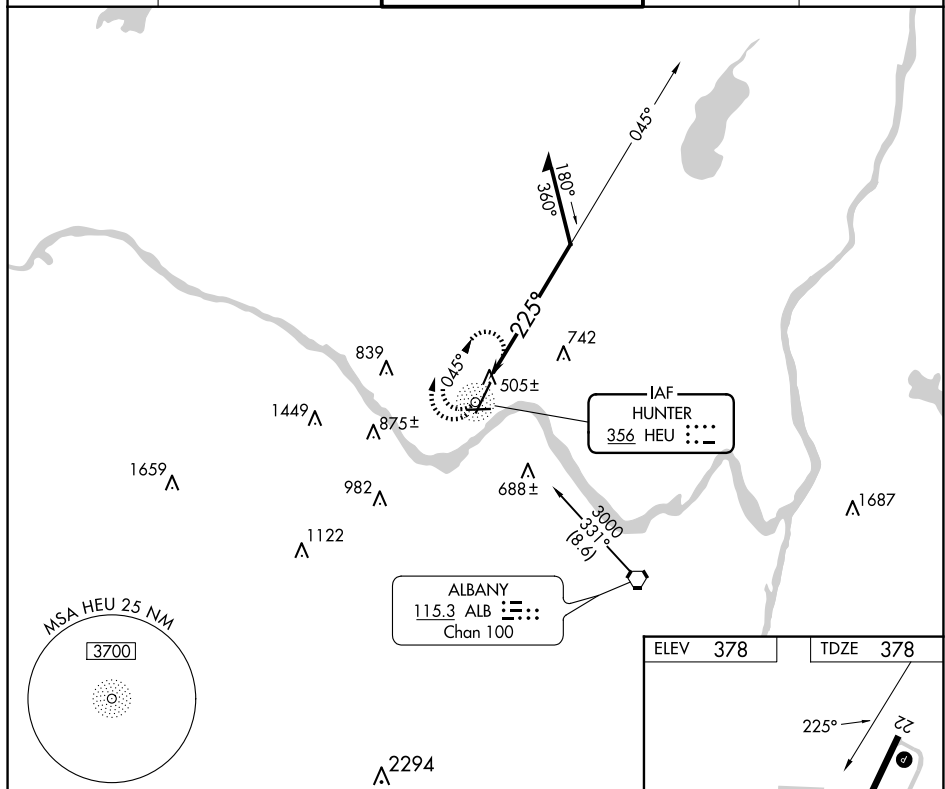

The diagram shows a cross-section of the HEU NDB. A vertical line represents the central axis, with a horizontal line at the top labeled '6000'. A curved arrow on the left indicates a 3100 degree rotation. A circular pattern of dots represents the HEU NDB. A line from the top center to the right edge is labeled '045°'. A line from the bottom center to the right edge is labeled '225°'. A line from the top center to the right edge is labeled 'Remain within 10 NM'. A line from the bottom center to the right edge is labeled '2400'.

CATEGORY	A	B	C	D
S-22	1160-1 782 (800-1)	1160-1¼ 782 (800-1¼)	1160-2½	782 (800-2½)
CIRCLING	1160-1 782 (800-1)	1160-1¼ 782 (800-1¼)	1160-2½ 782 (800-2½)	1320-3 942 (1000-3)

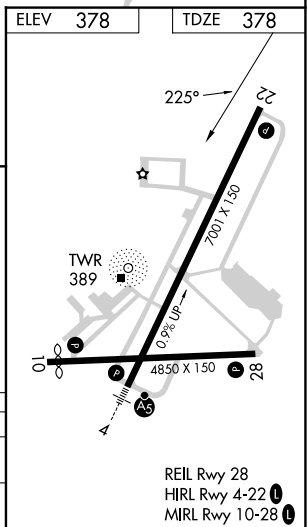

NDB RWY 22