RNAV (GPS) RWY 28

SCHENECTADY COUNTY (SCH)

WAAS	APP CRS	Rwy Idg	4850
CH 97622	282°	TDZE	323
W28A		Apt Elev	378

T
NA

Circling Rwy 10 NA at night. Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Albany altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C/D visibility ⅛ mile.

MISSED APPROACH: Climb to 3000 direct UNMIP and hold.

AWOS-3	ALBANY APP CON	SCHENECTADY TOWER ★	GND CON	UNICOM
119.275	132.825 263.075	121.3 (CTAF) L 321.1	121.9	122.95

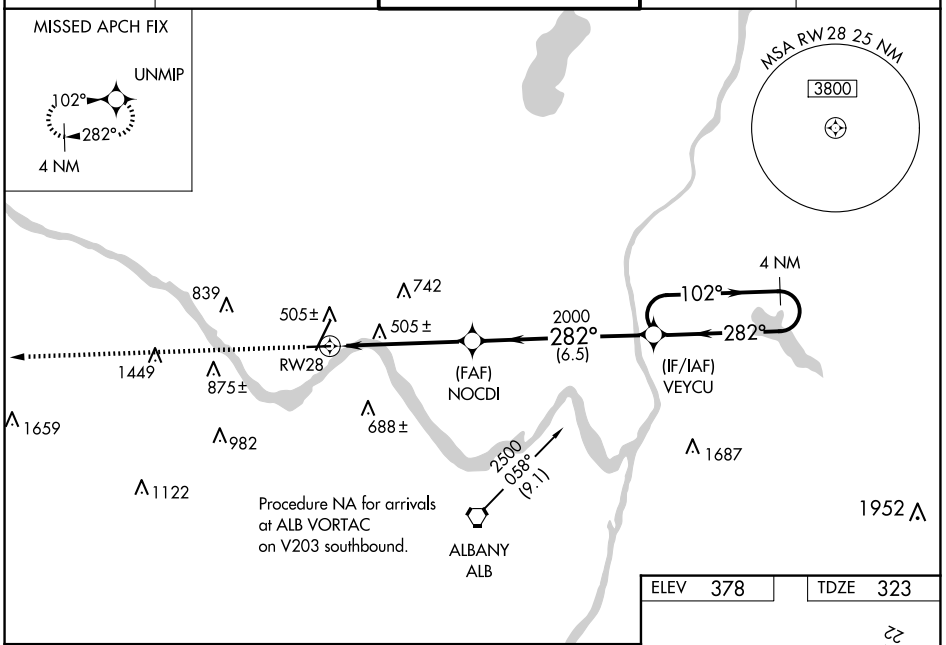

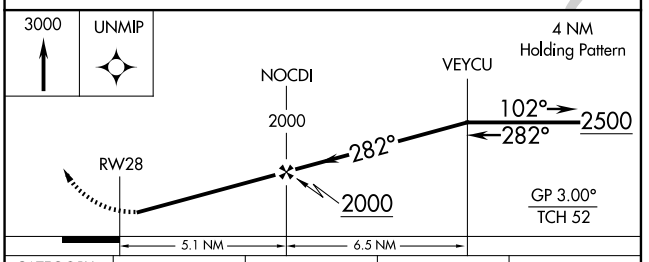

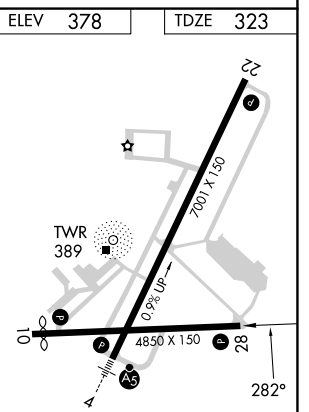

CATEGORY	A	B	C	D
LPV DA	618-1 295 (300-1)			
LNAV/VNAV DA	774-1½ 451 (400-1½)			
LNAV MDA	820-1 497 (500-1)		820-1⅜ 497 (500-1⅜)	
CIRCLING	880-1 502 (600-1)	940-1 562 (600-1)	1120-2¼ 742 (800-2¼)	1320-3 942 (1000-3)

REIL Rwy 28
HIRL Rwy 4-22 L
MIRL Rwy 10-28 L

NE-2, 07 AUG 2025 to 04 SEP 2025
NE-2, 07 AUG 2025 to 04 SEP 2025