





WAAS CH 66100 W13A	APP CRS 132°	Rwy Ldg 12803 TDZE 1066 Apt Elev 1078
--	------------------------	--

RNAV (GPS) RWY 13
TOPEKA RGNL (FOE)

RNP APCH.  When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats visibility ½ SM, LNAV Cat C visibility ½ SM and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA when using Philip Billard Muni altimeter setting. For unconfigured Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		MALSF 	MISSED APPROACH: Climb to 3000 direct ERJAG and hold.
ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER ★ 120.8 (CTAF) 0 340.2	GND CON 118.425 275.8
			UNICOM 122.95

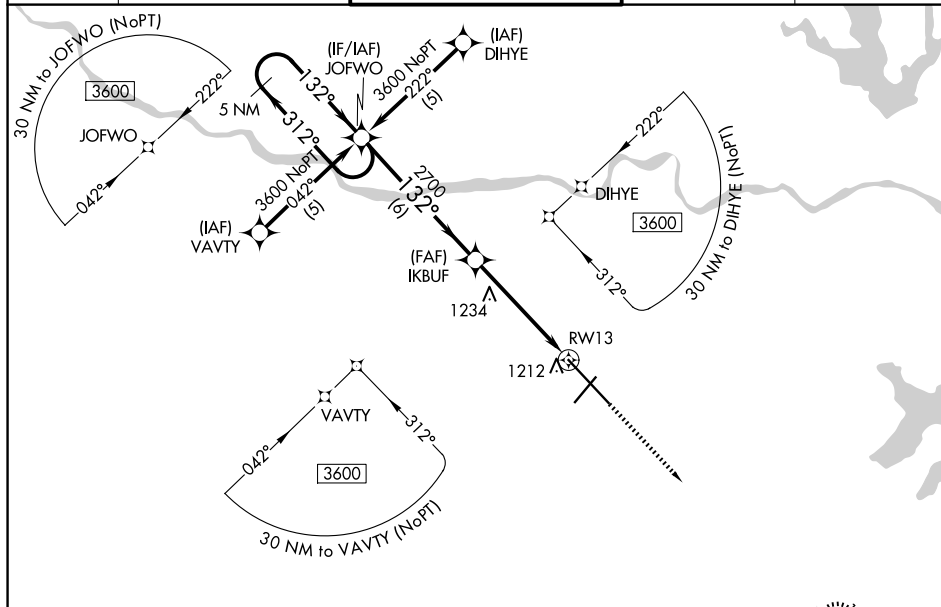

ELEV 1078	D	TDZE 1066
-----------	----------	-----------



REIL Rwy 3, 13 and 21
MIRL Rwy 3-21 **L**
HIRL Rwy 13-31 **L**